




# Z508-95

Ø9 EXTRA HEAVY-DUTY ARC COATED DRAIN W/ ARC COATED FABRICATED SEDIMENT BUCKET AND ARC COATED SECONDARY STRAINER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

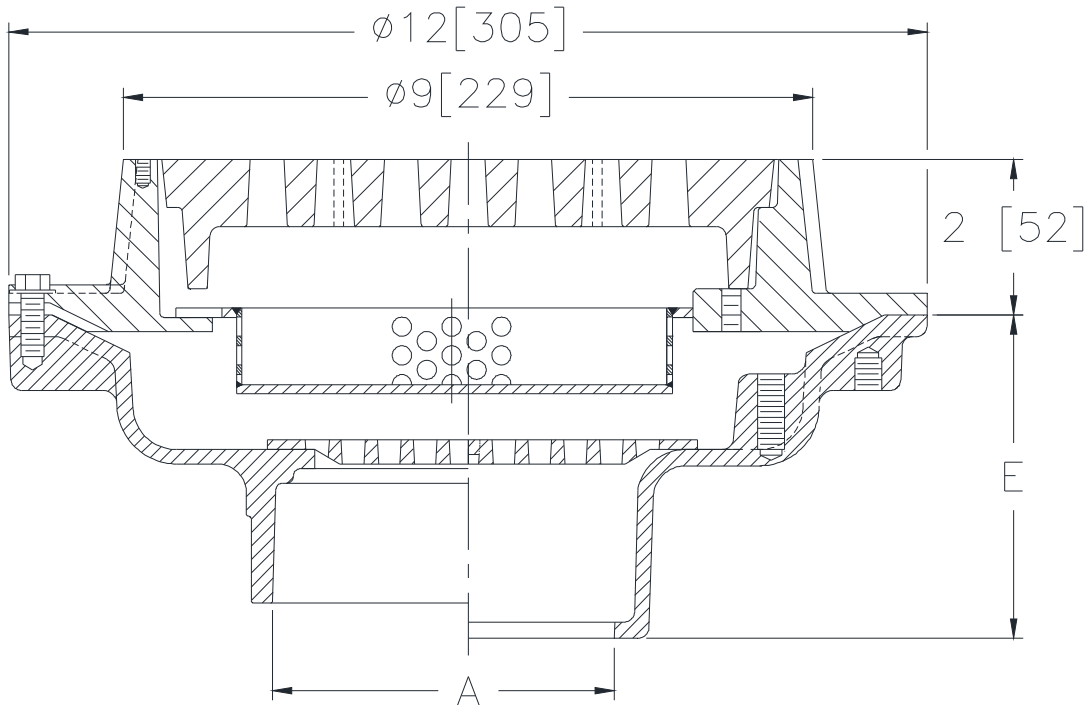

A- Pipe Size In.	Approx. Wt. Lbs.	Grate Open Area Sq. In.
2-3-4 [51-76-102]	21 [10]	18 [116]

**ENGINEERING SPECIFICATION: ZURN Z508-95**

9 [229] Diameter top drain, acid resisting epoxy coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp, ARC coated fabricated sediment bucket, ARC coated secondary strainer and frame for extra heavy-duty ARC cast iron deep flange slotted grate.

**OPTIONS** (Check/specify appropriate options)

**OUTLET** (Specify type)

- \_\_\_\_\_ **IC** Inside Caulk
- \_\_\_\_\_ **IC** Inside Caulk w/Sealtrol Gskt.
- \_\_\_\_\_ **IP** Threaded
- \_\_\_\_\_ **NH** No-Hub
- \_\_\_\_\_ **NL** Neo-Loc

**PIPE SIZE** (Specify size)

- \_\_\_\_\_ 2,3,4 [51-76-102]
- \_\_\_\_\_ 2,3,4 [51-76-102]
- \_\_\_\_\_ 2,3,4 [51-76-102]
- \_\_\_\_\_ 2,3,4 [51-76-102]
- \_\_\_\_\_ 2,3,4 [51-76-102]

**'E' BODY HT. DIMENSION**

- 3-3/4 [95]
- 3-3/4 [95]
- 2-3/4 [70]
- 4-3/4 [121]
- 3-3/4 [95]

**PREFIXES**

- \_\_\_\_\_ **Z** D.C.C.I Body and Grate\*

**SUFFIXES**

- \_\_\_\_\_ -DG Duresist Grate
- \_\_\_\_\_ -P Trap Primer Connection
- \_\_\_\_\_ -V Backwater Valve (See Z1099)
- \_\_\_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_\_\_ -90 90° Threaded Side Outlet Body (2 thru 4 [51 thru 102])

REV.	DATE: 03/18/13	C.N. NO. 128948
PROD./DWG. NO. Z508-95		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED