




Z1185-96 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

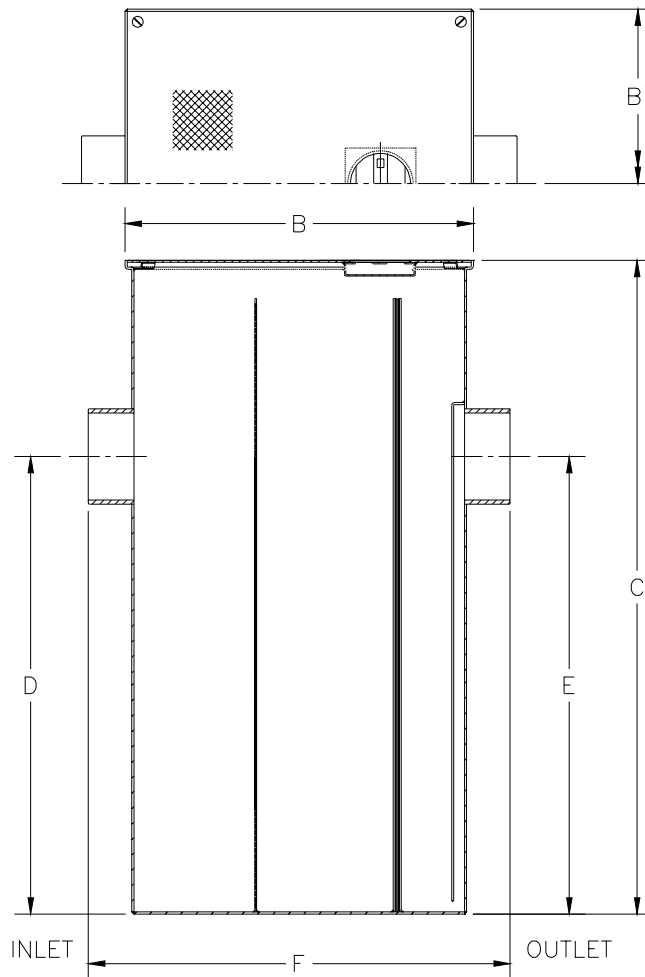

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
3	4 [102]	35 [133]	98 [45]	16 [407]	16 [407]	30 [762]	21 [534]	21 [534]	19 3/8 [492]
8	4 [102]	80 [303]	354 [161]	60 [1524]	16 [407]	30 [762]	21 [534]	21 [534]	63 3/8 [1610]

ENGINEERING SPECIFICATION: ZURN Z1185-96 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

____-RS Stainless Steel Screen Replacement Assembly

REV.	DATE: 11/19/04	C.N. NO. 92740
DWG. NO. P-15099 PRODUCT NO. Z1185-96		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED