


Z-1188-99 LARGE CAPACITY OIL INTERCEPTOR

ENGINEERING SPECIFICATION: ZURN Z-1188-99 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side. Secured gasketed non-skid

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

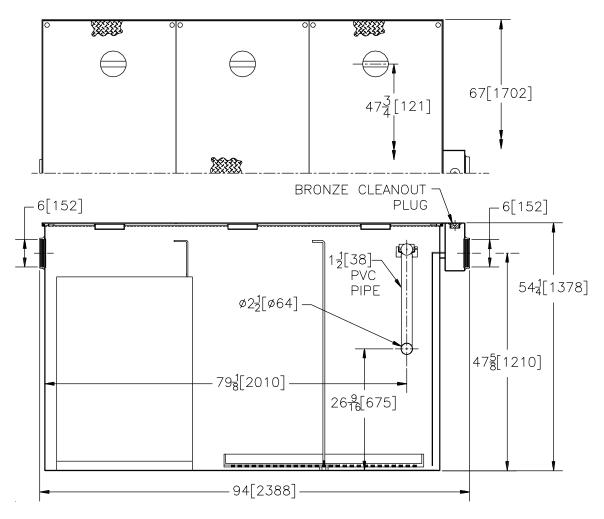

Flow Rate GPM[L]Min		Water Capacity Gal. [L]		No. of Covers
400 [1514]	6 [150]	1090 [4126]	2536 [1150]	3

OPTIONS (Check/specify appropriate options)

specify appropriate options) covers (3) complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

- PREFIXES
- Acid Resistant Coated Fabricated Steel*

SUFFIXES

-E Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify height required) for recessed installation.
-HD Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
-K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accomodate -K.
-KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

	REV.	DATE: 10/1	1/95	C.N. NO. 73017				
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO. P	-14246	PRODUCT	۲NO. Z-1188-99				
ZURN INDUSTRIES, INC.								