




Z1186-138

SIZE 600 OIL INTERCEPTOR W/ 4 [102] INLET, OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

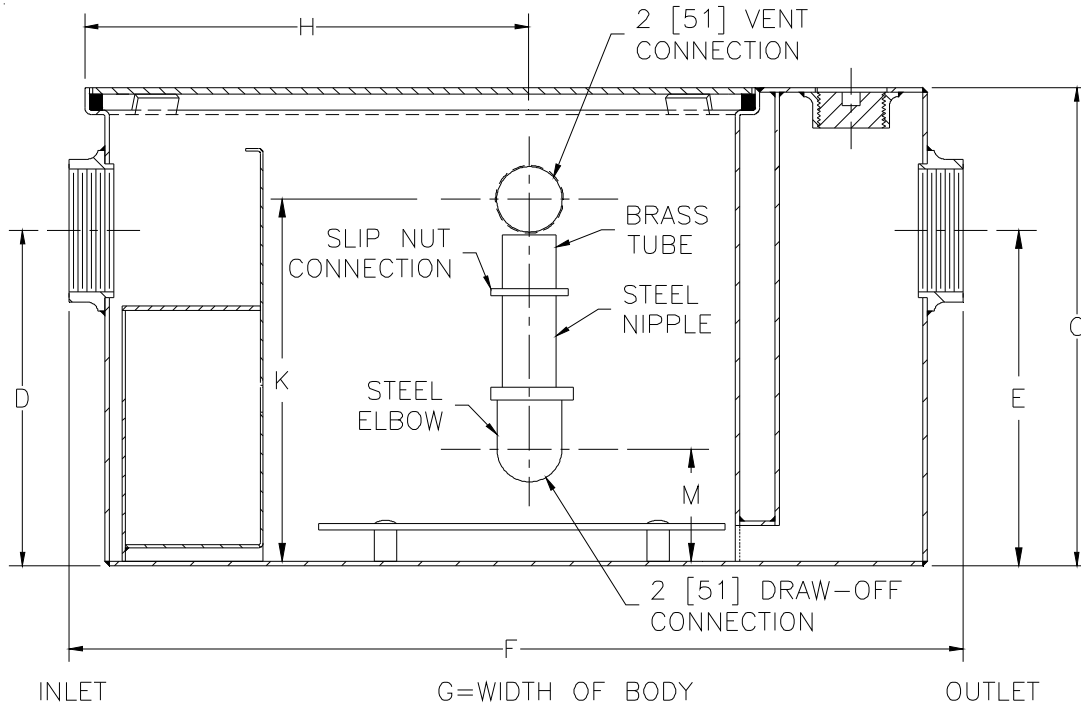

Size	Inlet/Outlet Size**	Flow Rate GPM [LPM]	Water Cap. Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches [mm]						
					C	D/E	F	G	H	K	M
600	4[102]	25 [94]	16 [60]	116 [53]	18-1/4[464]	12-1/4[311]	30[762]	17-1/4 [438]	16[406]	15-1/4[387]	4[102]

ENGINEERING SPECIFICATION: ZURN Z1186-138

Size 600 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil draw-off and vent connections either side, secured gasketed non-skid cover, complete with flow control fitting. Regularly furnished with 4" [102mm] inlet and outlet in high position.

Note: Location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ -HD Heavy duty traffic cover rated at 10,000 lbs. [4536] Kg. maximum safe live load. A 3 [76] minimum extension height is required when heavy-duty cover (-HD) option is specified. (Specify 'C' Dim. height required.)
- ___ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified. (Specify 'C' Dim. height required.)
- ___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.

* Regularly furnished unless otherwise specified.