


## Z890-100

# SPECIFICATION SHEET

## 6[152] WIDE REVEALTRENCH DRAIN SYSTEM WITH PAN AND CLAMPING COLLAR 6 [152] FROM TOP

TAG	

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

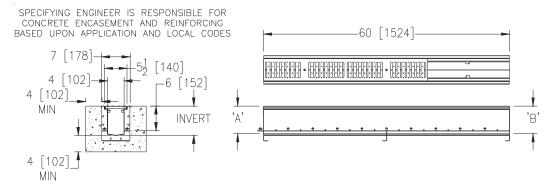

#### **ENGINEERING SPECIFICATION:** Zurn Z890-100

Channels are 60" [1524mm] long, 7" [178mm] wide and have a 4" [102mm] throat. Modular channel sections are made of 16ga. fabricated Stainless Steel conforming to ASTM A-240 (type 304). Channels have a bolted, flanged connection between channel sections that will not separate during the installation, gaskets available. Channels provided with 1/8" [3mm] weep holes above the pan, with a continuous water tight weld of the clamp collar, studs to be provided for attachment of provided clamp collar on 6" [152mm] centers. Channels weigh less than 2.31 lbs.[1.05kg] per linear foot, have a smooth, 1-1/2" [38mm] radiused self cleaning bottom with a Manning's coefficient of .009 and 1.04% or neutral 0% built in slope. Channels have feet for patty pour or leveling studs standard to secure trench in its final location. Channels provided with standard FS grates that lock down to frame. Zurn 6" [152mm] wide reveal Fabricated Stainless Steel Grate conforming to ASTM specification A-240, (type 304), is rated class A per the DIN EN1433 top load classification. Supplied in 40" [1016mm] nominal lengths with 5/16" [8mm] wide slots, and 3/4" [19mm] bearing depth. Grate has an open area of 12 sq. in per ft. [22,717 sq. mm per meter]. Channels produced in the U.S.A.

#### PREFIX OPTIONS (Check/specify appropriate options) Five-foot, Type 304 Stainless Steel

SUFFIX OPTIONS	(Check/specify	annronriate	ontions)

Outlet	Adantars	Add/Each
Outlet	Auableis	Auu/Eacii

E1	Closed End Cap	U2	2 [51] No-Hub Bottom Outlet
E2	2 [51] No-Hub End Outlet		3 [76] No-Hub Bottom Outlet
	3 [76] No-Hub End Outlet	U4	4 [102] No-Hub Bottom Outlet
E4	4 [102] No-Hub End Outlet		

Black Acid Resistant Epoxy Coated Ductile Grate - Class C

### Grate Options (Load Classifications are per DIN EN1433)

BDE	Black Acid Resistant Epoxy Coated Ductile Grate - Class E
DC	Ductile Iron Solid Cover - Class C
DGC	Ductile Iron Slotted Grate - Class C
-DGE	Ductile Iron Slotted Grate - Class E
HPD	Heel-Proof Ductile Slotted Grate - Class C
-HPP	Heel-Proof Polyethylene Grate - Class A
LD	Ductile Iron Longitudinal Slotted Grate - Class B
-RFS	Reinforced Stainless Steel Slotted Grate - Class B
-RPS	Reinforced Stainless Steel Perforated Grate - Class B
-RFSC	
	Reinforced Perforated Stainless Steel Grate - Class C

	Reinforced			ed Punch	Grate -	Class C

Decorative	<b>Grate Options</b> (Load Classifications are per DIN EN1433)
BCD	
-BDD	Bronze Diagonal Decorative Grate - Class A

-DCD	Ductile Iron Circular Decorative Grate - Class C
-DDD	Ductile Iron Diagonal Decorative Grate - Class A
-DOG	Ductile Iron Decorative Grate - Class A
-DWV	Ductile Wave Decorative Grate - Class A
-HPB	Heel-Proof Bronze Slotted Grate - Class A
-HPS	Heel-Proof Stainless Steel Slotted Grate - Class A
-SBG	Stainless Steel Bar Grate - Class E
-SCD	Stainless Steel Circular Decorative Grate - Class B
SDD	Stainless Steel Diagonal Descriptive Crots Class I

Stainless Steel Diagonal Decorative Grate - Class B Stainless Steel Mesh Grate - Class A -SMG

Stainless Steel Decorative Grate - Class B

Trench	'A'	'B'	Flow		
No.	Shallow Inv.	Deep Inv.	(cfs)	(gpm)	(lps)
89006N	7.25 [184]	7.25 [184]	-	-	-
89007	7.25 [184]	7.88 [200]	0.586	263	17
89008	7.88 [200]	8.50 [216]	0.651	292	18
89008N	8.50 [216]	8.50 [216]	-	-	-
89009	8.50 [216]	9.13 [232]	0.715	321	20
89010	9.13 [232]	9.75 [248]	0.778	349	22
89010N	9.75 [248]	9.75 [248]	-	-	-
89011	9.75 [248]	10.38 [264]	0.842	378	24
89012	10.38 [264]	11.00 [279]	0.907	407	26
89012N	11.00 [279]	11.00 [279]	-	-	-
89013	11.00 [279]	11.63 [295]	0.971	436	28
89014	11.63 [295]	12.25 [311]	1.036	465	29
89014N	12.25 [311]	12.25 [311]	-	-	-
89015	12.25 [311]	12.88 [327]	1.101	494	31
89016	12.88 [327]	13.50 [343]	1.165	523	33
89016N	13.50 [343]	13.50 [343]	-	-	-
89017	13.50 [343]	14.13 [359]	1.230	552	35
89018	14.13 [359]	14.75 [375]	1.295	581	37
89018N	14.75 [375]	14.75 [375]	-	-	-
89019	14.75 [375]	15.38 [391]	1.359	610	39
89020	15.38 [391]	16.00 [406]	1.424	639	40

### MADE in the U.S.A. (Load Classifications are per DIN EN1433)

-BDE-USA -DGC-USA Black Acid Resistant Epoxy Coated Ductile Grate - Class E Ductile Iron Slotted Grate - Class C Ductile Iron Slotted Grate - Class E -DGE-USA

Fabricated Stainless Steel Slotted Grate - Class A \*

-PPC Plastic Perforated Grate - Class C -PS Perforated Stainless Steel Grate - Class A

# Decorative MADE in the U.S.A. (Load Classifications are per DIN EN1433) \_\_\_ -BZ Bronze Decorative Grate - Class A

-NBZ-USA Nickel Bronze Decorative Grate - Class A Perforated Stainless Steel Raised Grate - Class A -PSR -SWG Stainless Steel Wire Grate - Class A

#### Miscellaneous Options

-DB **Bottom Dome Strainer** -VP Vandal-Proof Lockdown

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 04/20/18 C.N. No. 139928

Z890-100 Prod. | Dwg. No.