




Z-1171-76

LOW PROFILE GREASE INTERCEPTOR W/SOLIDS INTERCEPTOR

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

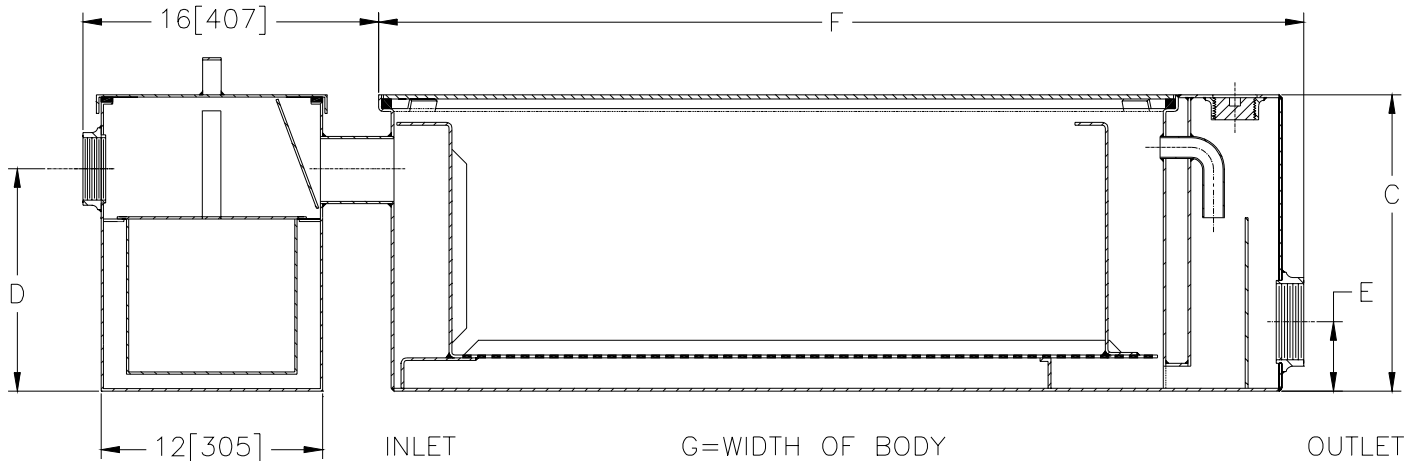

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D	E	F	G
700	3** [75]	35 [132]	30 [113]	70 [32]	172 [78]	10 3/4 [273]	7 [178]	3 1/8 [79]	42 1/8 [1070]	29 3/8 [746]
800		50 [189]	45 [170]	100 [45]	210 [95]	16 [406]	12 [305]	10 [254]	49 1/2 [1257]	27 3/4 [705]

ENGINEERING SPECIFICATION: ZURN Z-1171-76 Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, rated at ___ GPM and ___ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover, Z-1108 flow control fitting, includes solids interceptor with removable sediment basket.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -EP Enzyme Port in Cover
 ___ -L Angle Type (Z-1108-L) Flow Control Device.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 7/9/97	C.N. NO. 78097
DWG. NO. P-14495		PRODUCT NO. Z-1171-76