




Z1188-ST-89

#200 GPM LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK, INTEGRAL EXTENSION, ANCHOR FLANGE, AND HEAVY-DUTY COVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

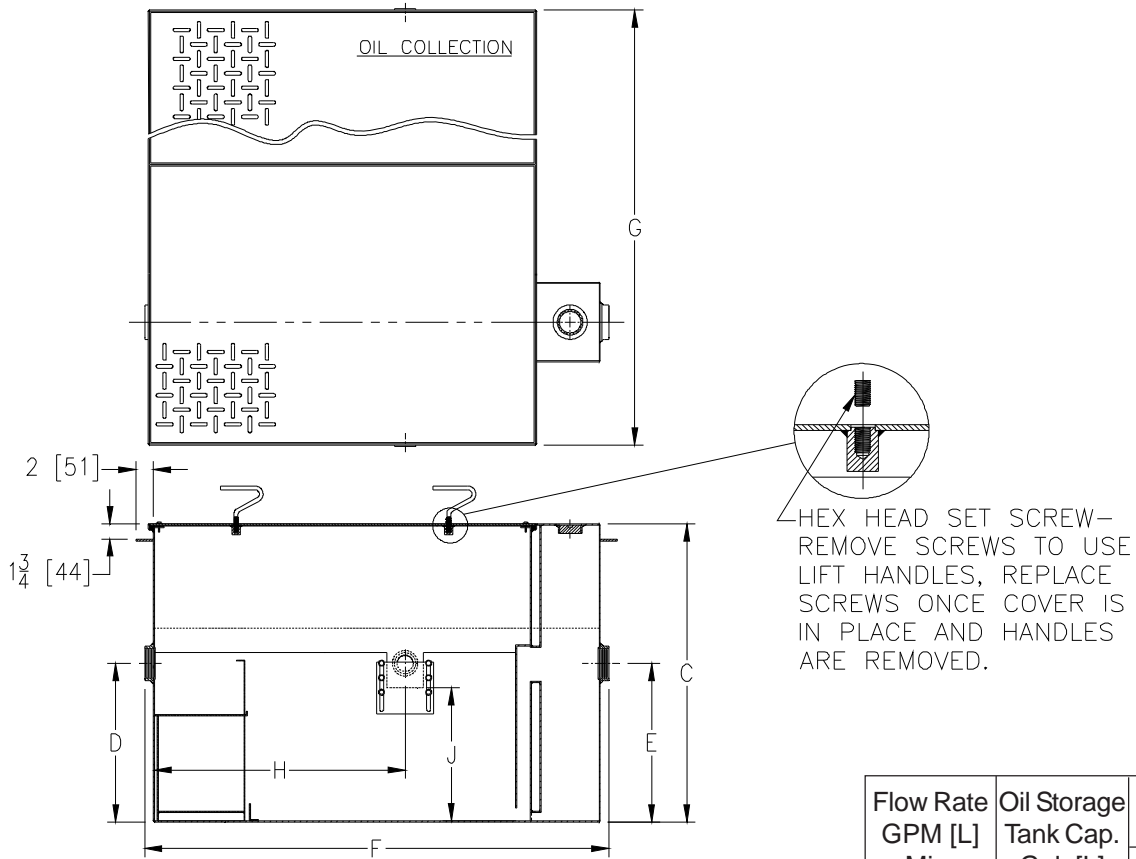

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
200 [757]	400 [1514]	2	2

Flow Rate GPM [L] Min.	Inlet/ Outlet Size	Water Capacity Gal. [L]	Approx. Wt. Lbs. [kg]	Dimensions in Inches					
				C	D/E	F	G	H	J
200 [757]	4 [102]	333 [1261]	2100 [953]	97-5/16 [2472]	29-7/8 [759]	71-3/8 [1813]	92-3/4 [2356]	43-1/2 [1105]	26-3/8 [670]

ENGINEERING SPECIFICATION: ZURN Z1188-ST-89

Acid Resistant Coated interior and exterior fabricated steel 200 GPM oil interceptor, with integral extension, anchor flange, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, oil draw-off, vent connections, secured gasketed heavy-duty non-skid traffic cover rated at 10,000 lbs. [4536 kg.] maximum safe live load, complete with flow control fitting and left hand integral storage tank. Regularly furnished with inlet and outlet in high position. Note: location of outlet from bottom of interceptor cannot be changed.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.
___ -STR Storage tank on right hand side when facing the inlet.

REV.	DATE: 07/10/12	C.N. NO. 124535
DWG. NO. 310069	PRODUCT NO. Z1188-ST-89	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED