




Z415B-83

BODY ASSEMBLY WITH "TYPE B" STRAINER & EXTENSIONS

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

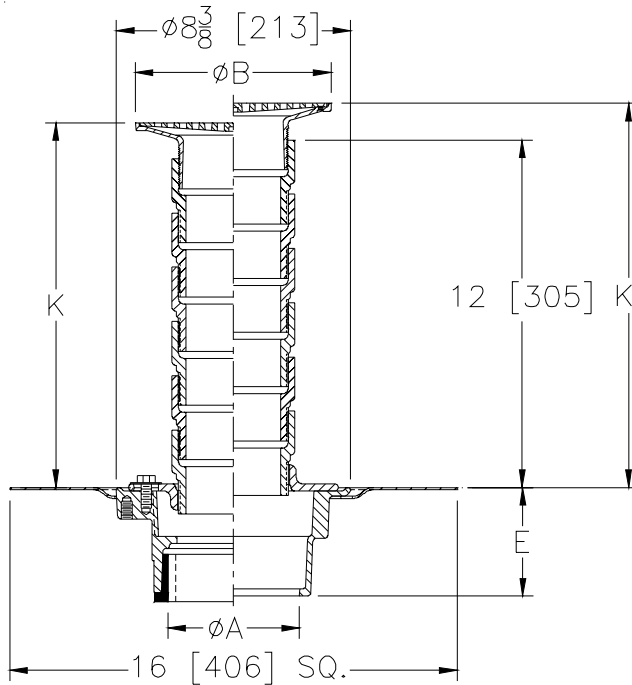

Dimensions In Inches						Approx. Wt. Lbs. [Kg.]	Strainer Open Area Sq. In. [Cm ²]
A Pipe Size	B Strainer Dia.	K		K'			
		Min.	Max.	Min.	Max.		
2-3 [51-76]	5 [127]	12 1/2 [318]	13 5/8 [346]	13 3/8 [340]	14 3/8 [365]	19 [9]	8 [52]
2-3-4 [51-76-102]	6 [152]	12 3/4 [324]	13 3/4 [349]	13 5/8 [346]	14 3/4 [375]	21 [10]	9 [58]
2-3-4 [51-76-102]	7 [178]	13 [330]	14 1/4 [362]	14 [356]	15 1/8 [384]	22 [10]	12 [77]
3-4 [76-102]	8 [203]	13 1/8 [333]	14 1/4 [362]	14 [356]	15 1/8 [384]	24 [11]	18 [116]
6 [152]	8 [203]	13 1/8 [333]	14 1/4 [362]	14 [356]	15 1/8 [384]	26 [12]	18 [116]
6 [152]	10 [254]	13 5/8 [346]	14 5/8 [371]	14 5/8 [371]	15 1/2 [394]	30 [14]	26 [168]

ENGINEERING SPECIFICATION:
ZURN ZN415B-83 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, roof sump receiver, U extensions and adjustable collar with "TYPE B" polished nickel bronze strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify type/size) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIMENSION

- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [66]
- 2 7/8 [73]
- 2 3/4 [69]
- 3 7/8 [98]
- 4 5/8 [117]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly with Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly with Polished Nickel Bronze Top*
- _____ ZS D.C.C.I. Body Assembly with 6 [152] Dia. Stainless Steel Top

SUFFIXES

- _____ -AA All Acid Resisting Epoxy
- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -G Galvanized Cast Iron
- _____ -HD Heavy Duty Slotted Grate (5 [127] & 6 [152] only)
- _____ -P Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -TC Neo-Loc Test Cap Gasket (2 - 4 [51 - 102] NL Bottom Outlet Only)
- _____ -V Backwater Valve
- _____ -VP Vandal-Proof Secured Top
- _____ -Y Sediment Bucket
- _____ -90 90° Side Outlet Body (2 [51] & 3 [76] only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A	DATE: 02/23/04	C.N. NO. 91961
DWG. NO. P-14137	PRODUCT NO. Z415B-83	

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292