
ADJUSTABLE VERTICAL BACK TO BACK SIPHON JET NO-HUB WITH SIDE INLETS

SPECIFICATION SHEET

TAG

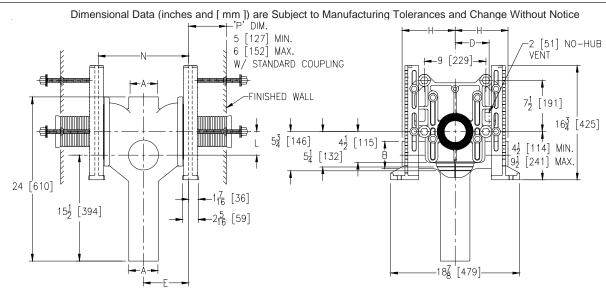

NOTE:

- 1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling.
- 2. Feet bolted to floor using min. 1/2 [13] diameter blots and back slots on carrier feet.

Product No.	Dimensions in Inches [mm]								Approx. Wt.
	Λ	В	D	E	Н	L		N	Lbs [kg]
	_ ^					Min.	Max.	IN	LUS [KY]
Z1204-2ND4	4 [102]	4 [102]	5 [1 27]	6-5/8 [168]	5-1/2 [140]	1-5/8 [41]	5-5/8 [143]	13-1/4 [337]	139 [60]
Z1204-2ND43		3 [76]	5 [121]						

ENGINEERING SPECIFICATION: ZURN Z1204-2ND()

Adjustable, vertical back to back siphon jet water closet "Rigid System" with 4" [102mm] size No-Hub connections and () side inlets. Complete with Dura-Coated cast iron double main fitting, with 2" [51mm] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable ABS coupling with integral test cap, fixture bolts, trim, stud protectors, and bonded "Neo-Seal" gasket.

PREFIXES Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling* ZQ D.C.C.I. System with Non-Adjustable Coupling	
SUFFIEXS	nbly et System or W.C.

Prod. | Dwg. No. Z1204-2ND

^{*} Regularly furnished unless otherwise specified.