




**Z1187-SI-139**  
**SIZE 1000 SAND INTERCEPTOR**

**SPECIFICATION SHEET**

**TAG \_\_\_\_\_**

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

\*12 [305] REGULARLY FURNISHED  
 SPECIFY DIMENSION IF HIGHER  
 OR LOWER IS REQUIRED

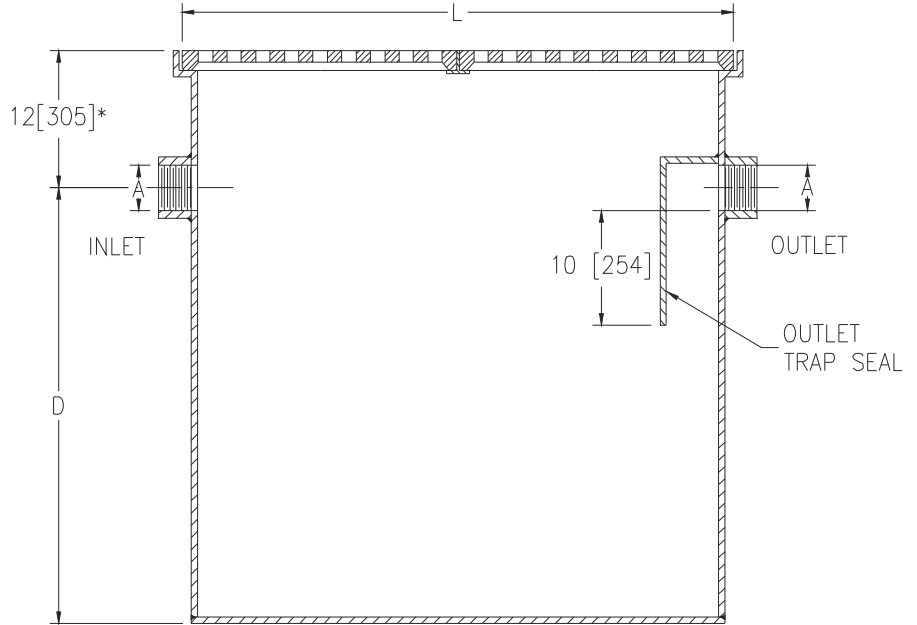

Size	Flow G.P.M. [L] (Max.)	Dimensions in Inch [mm]				Number of 12 x 24 [305 x 610] Grates	Capacity Gal. [L] (Static)	Approx. Wt. Lbs. [Kg]
		A Pipe Size	L	D	Width			
1000	1000 [3786]	10 [254]	192 [4877]	66 [1676]	48 [1219]	32	2400 [9084]	4408 [1999]

**ENGINEERING SPECIFICATION: ZURN Z1187-SI-139**

Acid Resistant Coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy-duty grates.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

**SUFFIXES**

- \_\_\_ -E Integral Extension Assembly (Specify extension height)
- \_\_\_ -DG Duresist Grate
- \_\_\_ -K Anchor Flange 1-3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K option.
- \_\_\_ -KC Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension required to accommodate -KC option.
- \_\_\_ -NH No-Hub Inlet and Outlet (Z1040)
- \_\_\_ -SC Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
- \_\_\_ -VP Vandal-Proof Screws

\* Regularly furnished unless otherwise specified.