




Z1170-127
ADJUSTABLE RECESSING
RECEIVER FOR GREASE INTERCEPTOR & FLOW CONTROL

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

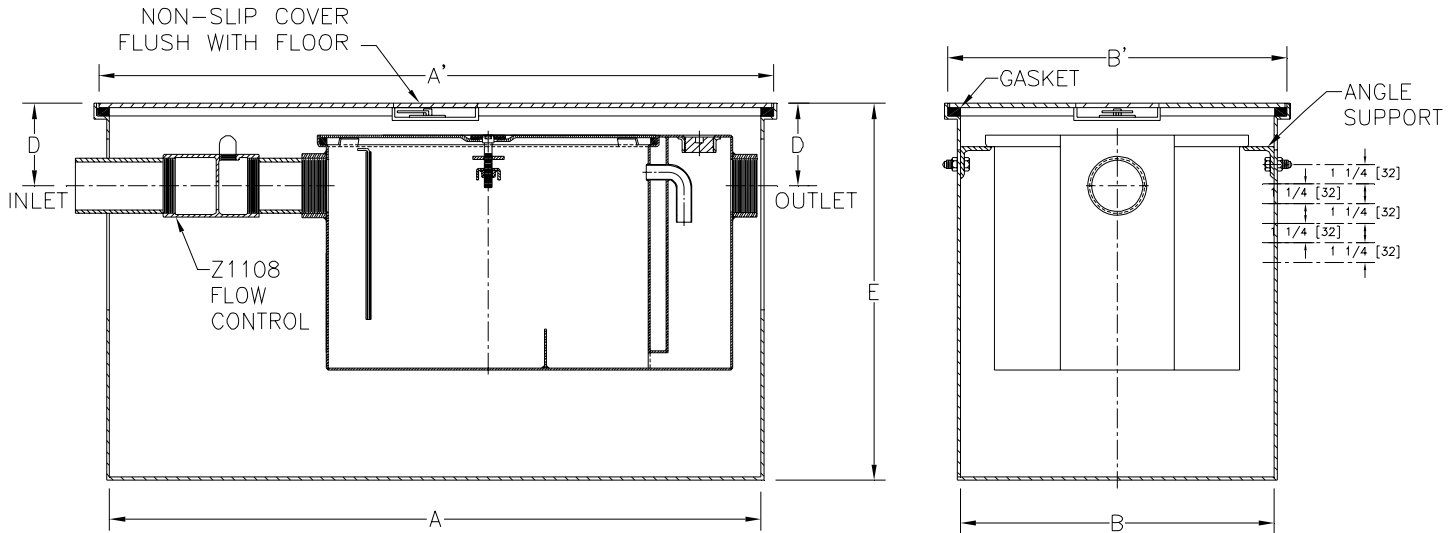

Size	Dimensions In Inches [mm]					
	A	A'	B	B'	D	E
600	46 [1168]	48 [1219]	23 1/4 [591]	25 1/4 [641]	6 1/2 [165]	25 3/4 [654]

ENGINEERING SPECIFICATION: ZURN Z1170-127 Acid Resistant Epoxy Coated Recessing receiver, enclosed type, equipped with adjustable support brackets and gasketed non-skid cover with recessed and covered lift handle. Complete with Z1170 Grease Interceptor. For interceptor specifications see Z1170 specification sheet.

PREFIXES

_____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ **-K** Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- _____ **-KC** Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified.
- _____ **-T** Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify required recess depth - 1/8 [3], 3/4 [19], or 1-1/4 [32]).

REV.	DATE: 4/22/08	C.N. NO. 98393
DWG. NO. P-15541	PRODUCT NO. Z1170-127	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED