




Z1185-115

LINT INTERCEPTOR W/INTEGRAL EXTENSION AND COVER RECESSED FOR 1/8 [3] THICK TILE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

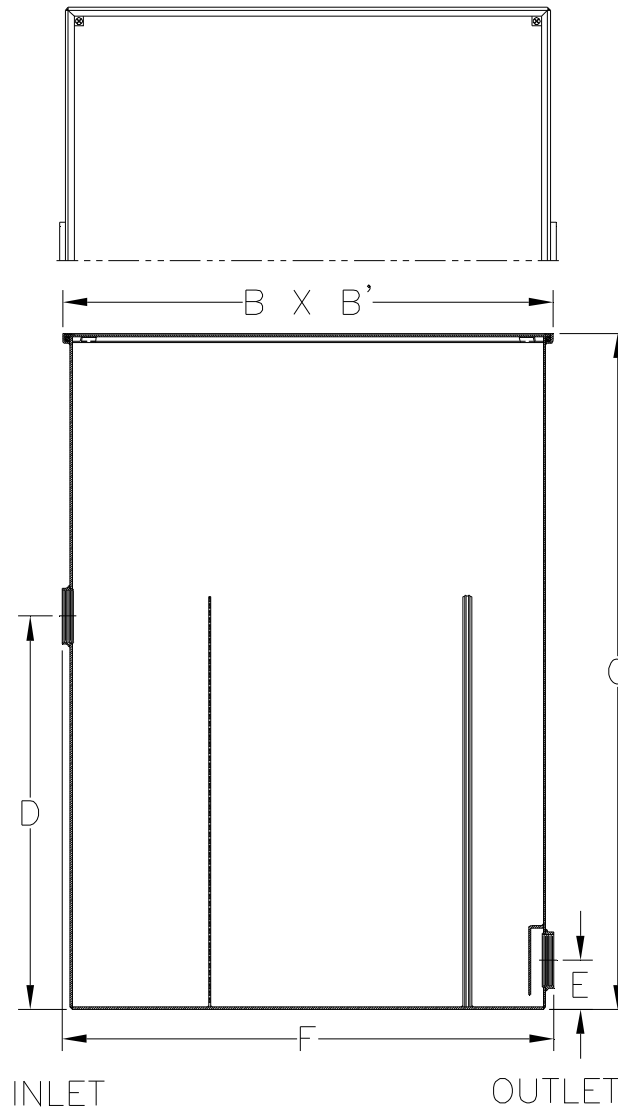

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
20	4 [102]	200 [756]	525 [238]	40 [1016]	40 [1016]	55 [1397]	32 [813]	4 [102]	41 [1041]

ENGINEERING SPECIFICATION: ZURN Z1185-115 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, secured cover recessed for 1/8 [3] thick tile, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ____ Z Acid Resistant Coated Fabricated Steel*
- ____ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ____-RS Stainless Steel Screen Replacement Assembly

REV. A	DATE: 12/18/09	C.N. NO. 110539
DWG. NO. P-15645 PRODUCT NO. Z1185-115		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED