




Z1187-SI-154
SIZE 200 SAND INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

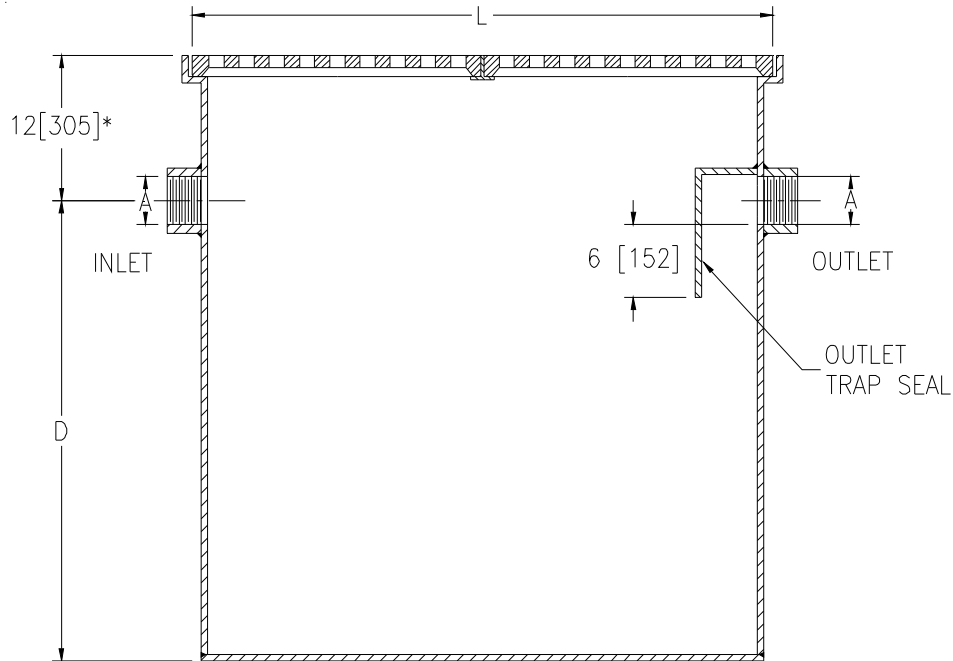

*12[305] REGULARLY FURNISHED—
 SPECIFY DIMENSION IF HIGHER
 OR LOWER IS REQUIRED

Size	Max. Flow GPM [LPM]	Dimensions in Inches [mm]				Static Capacity Gal. [L]	No. of 12 x 24 [305 x 610] Grates	Approx. Wt. Lbs. [kg]
		A Pipe Size	L	D	Width			
200	200 [757]	4 [102]	48 [1219]	48-1/8 [1222]	48 [1219]	480 [1817]	8	400 [181]

ENGINEERING SPECIFICATION: ZURN Z1187-SI-154

Acid resistant coated interior and exterior fabricated steel sand interceptor with threaded inlet and outlet, complete with removable heavy-duty grates.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ -E Integral Extension Assembly (Specify extension height)
- ___ -DG Duresist Grate
- ___ -K Anchor Flange 1-3/4 [44] down from top and 2 [51] wide. No extension required to accommodate -K option.
- ___ -KC Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No extension required to accommodate -KC option.
- ___ -NH No-Hub Inlet and Outlet (Z1040)
- ___ -SC Heavy-Duty Reinforced Cover(s) rated at 10,000 lbs. [4536 Kg.] maximum safe live load.
- ___ -VP Vandal-Proof Screws

* Regularly furnished unless otherwise specified.