ZURN®

Z415G-SR
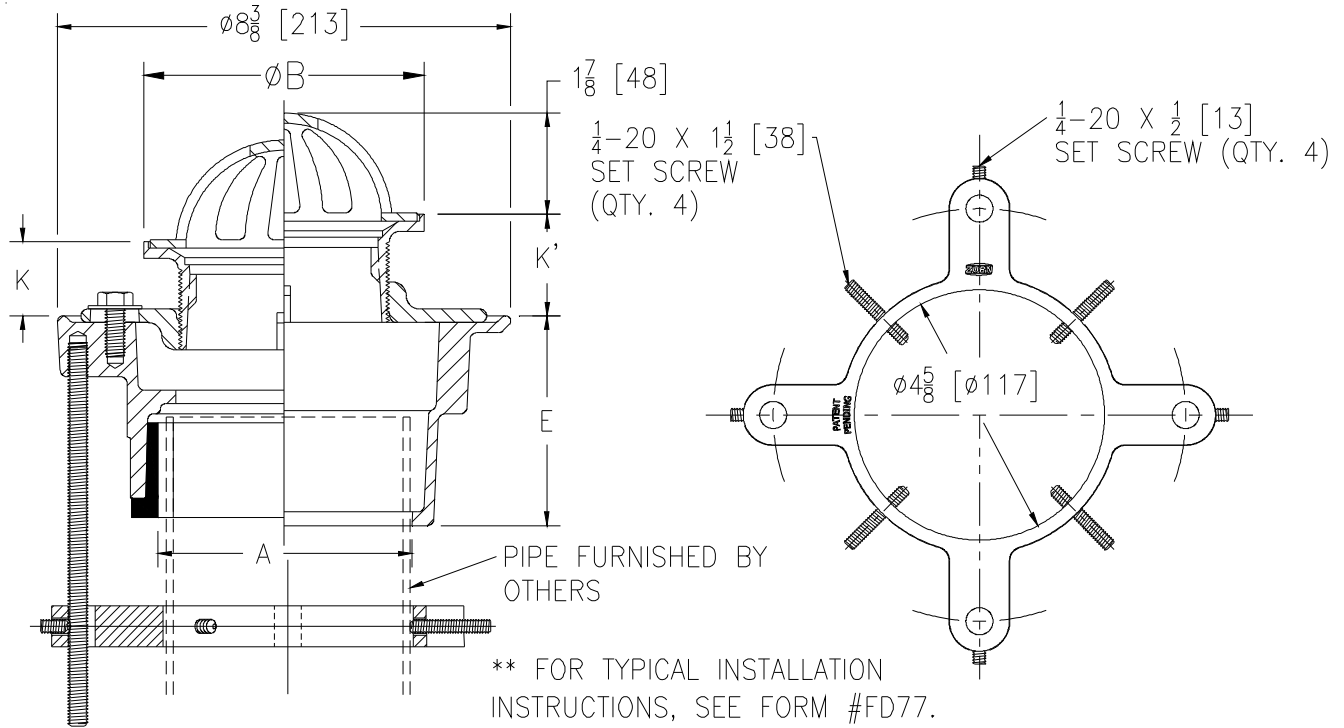### FLOOR AND SHOWER DRAIN
W/ "TYPE G" STRAINER AND STABILIZER RING

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

** FOR TYPICAL INSTALLATION INSTRUCTIONS, SEE FORM #FD77.

Dimensions in inches [mm]							Approx Wt.	Strainer Open Area
A	B	K		K'				
Pipe Size	Strainer Dia.	Min	Max	Min	Max		lbs [kg]	in² [cm²]
2,3 [51,76]	5 [127]	1 [25]	1-1/2 [38]	1-3/32 [28]	2-1/4 [57]		13 [6]	10 [65]
2,3,4 [51,76,102]	6 [152]	1 [25]	1-25/32 [45]	1-13/32 [36]	2-17/32 [64]		15 [7]	12 [77]

ENGINEERING SPECIFICATION: ZURN ZN415G-SR
Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots and "TYPE G" polished nickel bronze strainer with dome grate. Complete with Dura-Coated cast iron floor drain stabilizer ring with four 1/4-20 x 1/2" [13mm] securing screws to 3/8-16 x 7" [178mm] threaded rod and four 1/4-20 x 1-1/2" [38mm] securing screws to outlet piping.

OPTIONS (Check/specify appropriate options)
PIPE SIZE

	(Specify size/type) **OUTLET**		**E BODY HT. DIM.**

2,3,4 [51,76,102]

2 [51]

3 [76]

4 [102]

2,3,4 [51,76,102]

2,3,4 [51,76,102]

_____ IC Inside Caulk — 4-3/16 [106]
_____ IP Threaded — 2-7/16 [62]
_____ IP Threaded — 2-3/4 [70]
_____ IP Threaded — 2-13/16 [71]
_____ NH No-Hub — 3-13/16 [97]
_____ NL Neo-Loc — 3-7/8 [98]

PREFIXES
_____ ZB D.C.C.I. Body with Polished Bronze Top
_____ ZN D.C.C.I. Body with Polished Nickel Bronze Top*

SUFFIXES
_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -G Galvanized Cast Iron
_____ -P Trap Primer Connection
(Specify 1/2 [13] or 3/4 [19])
_____ -SS Stainless Steel Mesh Screen Over Dome

_____ -TC Neo-Loc Test Cap Gasket
(2,3,4 [51,76,102] NL Bottom Outlet Only)
_____ -U 1 - 3 [25 - 76] High Extension Adapter
_____ -V Backwater Valve
_____ -VP Vandal Proof Secured Top
_____ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.