




Z1173-TD-89

GREASE INTERCEPTOR WITH GREASE ACCUMULATING CONE, INLINE SHUTOFF VALVE, AND CUSTOM HEIGHT RECESSING RECEIVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

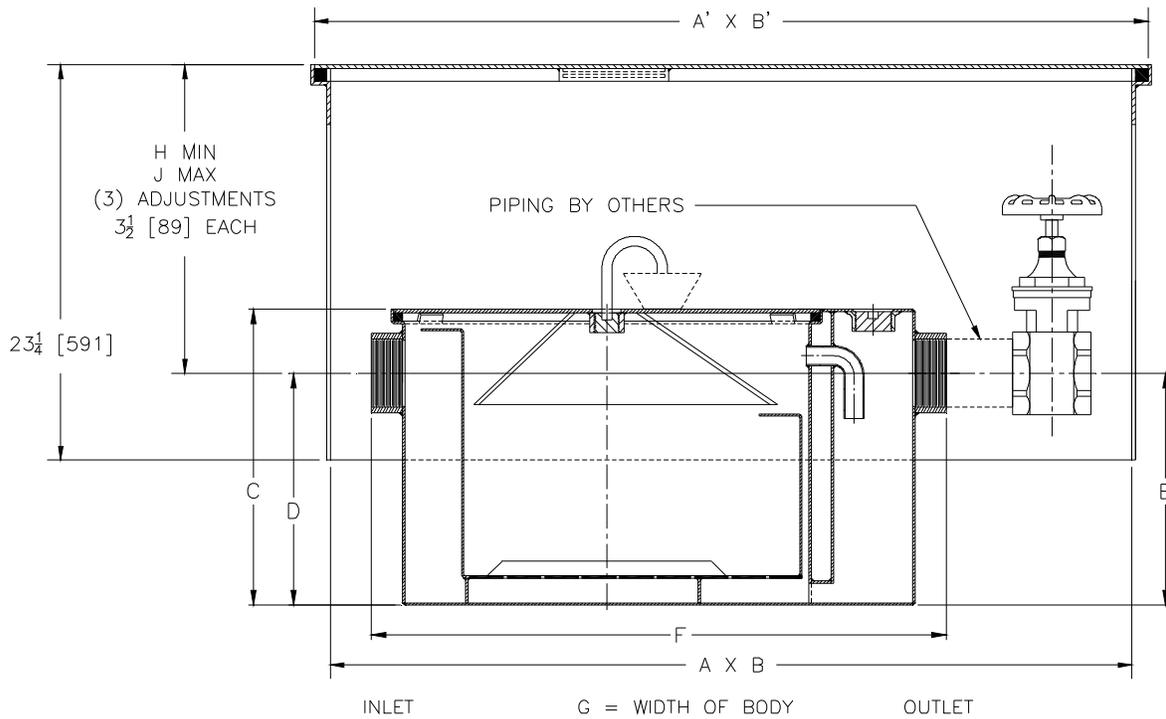

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]
			Water Gal. [L]	Grease Lbs. [kg]	
500	3[76]	20 [76]	16 [61]	40 [18]	297 [135]

Dimensions in Inches [mm]										
Size	A	A'	B	B'	C	D/E	F	G	H	J
500	47-1/4[1200]	49-1/4[1251]	23-1/4[591]	25-1/4[641]	17[432]	12-1/2[318]	32-1/4[819]	19-7/8[505]	9-1/2[241]	20 [508]

ENGINEERING SPECIFICATION: ZURN Z1173-TD-89

Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 20 GPM and 40 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with draw off port having bronze plug, grease accumulating cone, NPT to hose adaptor, 24 [610] long flexible hose, hose clamp, and an in line closure valve. Complete with Acid Resistant Coated interior and exterior fabricated steel recessing receiver with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle and Z1108 Flow Control Fitting. Regularly furnished inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

____ -L Angle type (Z1108-L) flow control device with plunger (no additional charge).

* Regularly furnished unless otherwise specified.