




Z415S-U

BODY ASSEMBLY W "TYPE S" STRAINER AND EXTENSION ADAPTER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

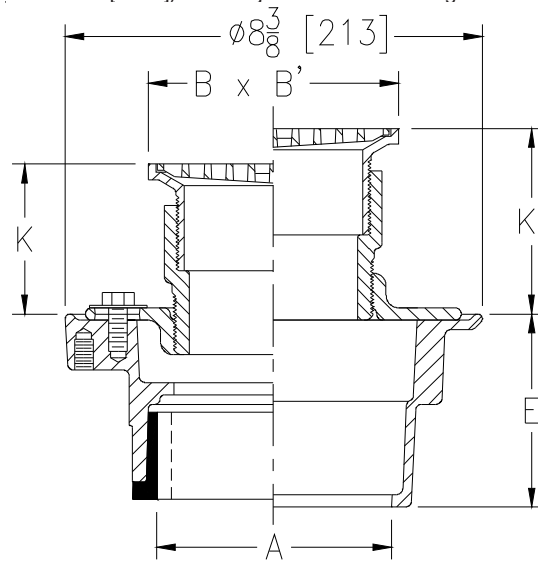

Dimensions in In [mm]						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm ²]
A - Pipe Size	B x B Strainer Top Size	K		K'			
		Min.	Max.	Min.	Max.		
2,3 [51,76]	5 x 5 [127 x 127]	3-1/4 [83]	4-1/8 [105]	3-7/8 [98]	5 [127]	12 [5]	9 [58]
2,3,4 [51,76,102]	6 x 6 [152 x 152]	3-3/8 [86]	4-1/4 [108]	4 [102]	5-1/4 [133]	13 [6]	13 [84]
2,3,4 [51,76,102]	7 x 7 [178 x 178]	3-5/8 [92]	5 [127]	4 [102]	5-7/8 [149]	14 [6]	21 [135]
3,4 [76,102]	8 x 8 [203 x 203]	3-5/8 [92]	5 [127]	3-3/8 [86]	5-7/8 [149]	15 [7]	28 [181]
6 [152]	10 x 10 [254 x 254]	3-5/8 [92]	5 [127]	3-3/8 [86]	5-7/8 [149]	21 [10]	28 [181]

ENGINEERING SPECIFICATION: ZURNZN415S-U

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, 3" [76mm] high extension adaptor and adjustable collar with "TYPE S" polished nickel bronze square strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2,3,4 [51,76,102]
- 2,3,4 [51,76,102]

(Specify size/type) OUTLET

- _____ IC Inside Caulk
- _____ IG Inside Gasket
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIM.

- 4-3/16 [106]
- 4-3/16 [106]
- 2-7/16 [62]
- 2-3/4 [70]
- 2-13/16 [71]
- 2-7/8 [73]
- 3-13/16 [97]
- 3-7/8 [98]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/Polished Nickel Bronze Top*

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -CP Chrome-Plated Bronze Top
- _____ -G Galvanized Cast Iron
- _____ -HD Heavy-Duty Slotted Grate (ZN 6 x 6 [152 x 152] Sizes Only)
- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -PC Protective Cover
- _____ -SA Stabilizer Assembly (See Z1035)
- _____ -SQ Stabilizer Q-deck (See 1035-Q)
- _____ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
- _____ -V Backwater Valve
- _____ -VP Vandal Proof Secured Top
- _____ -Y Sediment Bucket
- _____ -90 2,3 [51,76] Side Outlet Body Assembly

* Regularly furnished unless otherwise specified.