


## Z1185-134 SOLIDS INTERCEPTOR - SIZE 20

**SPECIFICATION SHEET** 

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

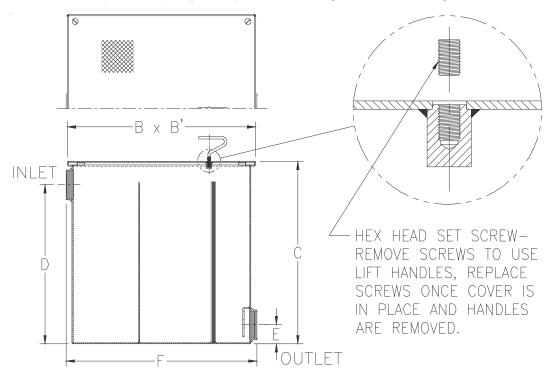

Size	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				В	B'	С	D	E	F
20	4 [102]	200 [756]	404 [183]	40 [1016]	40 [1016]	35 [889]	32 [813]	4 [102]	41 [1041]

## **ENGINEERING SPECIFICATION: ZURN Z1185-134**

Acid Resistant Coated interior and exterior fabricated steel solids interceptor, non-skid secured cover with removable lift handle, stainless solids intercepting secondary screen assembly with 3/32 [2] square openings and permanent primary straining baffle with 3/8 [10] diameter perforated holes.

**OPTIONS** (Check/specify appropriate options)

<b>PREFIXES</b>	
Z ZS	Acid Resistant Coated Fabricated Steel* All Type 304 Fabricated Stainless Steel
SUFFIXES	
E	Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).
RS	Stainless Steel Screen Replacement Assembly

REV. DATE: 02/27/13 C.N. NO. 128860 PROD./DWG. NO. Z1185-134

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED