




Z1185-120 LINT INTERCEPTOR W/SIDE OUTLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

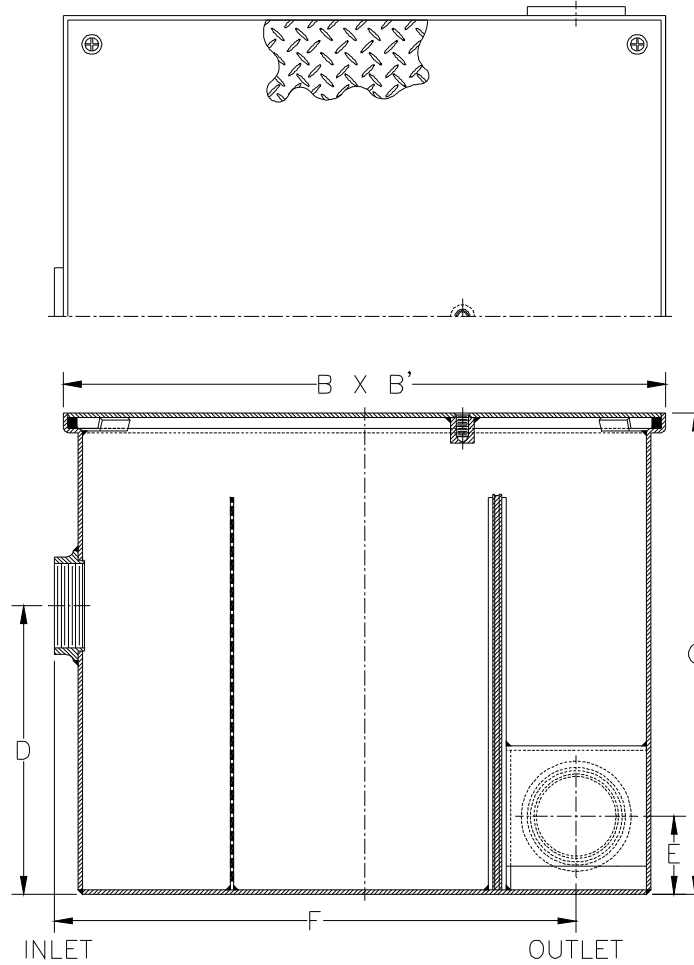

Size No. of Machines	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
7	3 [76]	70 [265]	155 [70]	25 [635]	25 [635]	20 [508]	12 [305]	3 1/4 [82]	21 11/16 [551]

ENGINEERING SPECIFICATION: ZURN Z1185-120 Acid Resistant Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with stainless lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

____ Z Acid Resistant Coated Fabricated Steel*

SUFFIXES

____ -E Acid Resistant Coated interior and exterior fabricated steel extension section (Specify 'C' dimension required for recessed installation).

____ -RS Stainless Steel Screen Replacement Assembly

REV.	DATE: 10/27/09	C.N. NO. 110365
DWG. NO. P-15786		PRODUCT NO. Z1185-120

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED