



Z886-HDS-LD-SW



SPECIFICATION SHEET

6 [159] WIDE REVEAL TRENCH DRAIN SYSTEM WITH HEAVY-DUTY STAINLESS STEEL FRAME ASSEMBLY WITH LIGHT-DUTY GRATES AND 9 [229] SIDEWALL EXTENSION

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES

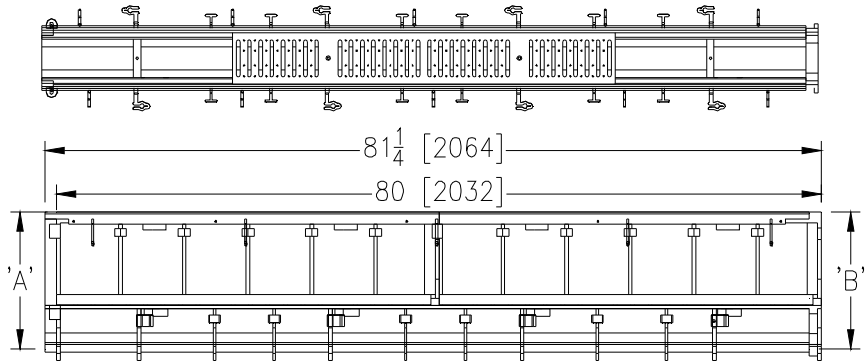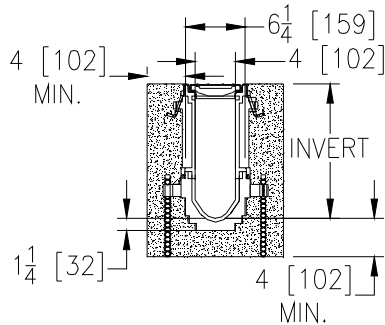

NOTE: + Actual Channel length is 81 1/4 [2064] to allow for overlap.

ENGINEERING SPECIFICATION: Zurn Z886-HDS-LD-SW Channels shall be 80 [2032] long, 6 [152] wide reveal and have a 4 [102] throat. Modular channel sections shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall have a positive mechanical connection between channel sections that will not separate during the installation and shall mechanically lock into the concrete surrounding every 10 [254]. Channels shall weigh less than 2.31 lbs. [1.05kg] per linear foot, have a smooth, 1.5 [38] radiused self cleaning bottom with a Manning's coefficient of 0.009 and 0.75% or neutral 0% built in slope. Channels shall have rebar clips standard to secure trench in its final location. Channels shall have HDPE SW Side Walls attached for an additional 9 [229] added to the standard channel invert for additional flow capability shown in chart below. Shall be provided with standard RFS grates that lock down to frame. Zurn 6 [152] wide reveal Reinforced Stainless Steel Grate conforming to ASTM specification A351, Grade CF8 (type 304), fabricated grate is rated class B per the DIN EN1433 top load classification. Supplied in 40 [1016] nominal lengths with 0.375 [10] wide slots, and 0.75 [19] bearing depth. Grate has an open area of 13.68 sq. in per ft. [28,956 sq. mm per meter]. The 0.105 [2.66] thick Heavy-Duty Stainless Steel Frame Assembly conforms to ASTM specification A-240 (type 304). with 10 - 4 [102] long concrete anchors per 80 [2032]. Grate lockdown bars are to be integral to the frame. All welds must be performed by a certified welder per ASTM standard AWS D1.6. Frames Shall be produced in the U.S.A. The System loading is based upon the grate being used.

PREFIX OPTIONS (Check/specify appropriate options)

___ Z Six-foot, Eight-inch High Density Polyethylene (HDPE)*

SUFFIX OPTIONS (Check/specify appropriate options)

Outlet Adapters Add/Each

- ___ -E1 Closed End Cap
- ___ -E2 2 [51] No-Hub End Outlet
- ___ -E3 3 [76] No-Hub End Outlet
- ___ -E4 4 [102] No-Hub End Outlet
- ___ -E6 6 [152] No-Hub End Outlet
- ___ -U2 2 [51] No-Hub Bottom Outlet
- ___ -U3 3 [76] No-Hub Bottom Outlet
- ___ -U4 4 [102] No-Hub Bottom Outlet
- ___ -U6 6 [152] No-Hub Bottom Outlet

Grate Options (Load Classifications are per DIN EN1433)

- ___ -GG Fiberglass Grate - Class A
- ___ -HPP Heel-Proof Polyethylene Grate - Class A
- ___ -RFS Reinforced Stainless Steel Slotted Grate - Class B*
- ___ -RPS Reinforced Stainless Steel Perforated Grate - Class B

Miscellaneous Options

- ___ -VP Vandal-Proof Lockdown
- ___ -JC Joint Connector

MADE in the U.S.A. (Load Classifications are per DIN EN1433)

- ___ -FS Fabricated Stainless Steel Slotted Grate - Class A
- ___ -GG Fiberglass Grate - Class A
- ___ -PG Perforated Galvanized Steel Grate - Class A
- ___ -SBG-L Stainless Steel Bar Grate - Class B

Miscellaneous Options

- ___ -DB Bottom Dome Strainer

Decorative MADE in the U.S.A. (Load Classifications are per DIN EN1433)

- ___ -BZ Bronze Decorative Grate - Class A
- ___ -NBZ Nickel Bronze Decorative Grate - Class A
- ___ -PSR Perforated Stainless Steel Raised Grate - Class A
- ___ -SWG Stainless Steel Wire Grate - Class A

Trench No.	'A' Shallow Inv.	'B' Deep Inv.	Flow		
			(cfs)	(gpm)	(lps)
8601SW	12.50 [318]	13.10 [333]	1.25	563	35
8602SW	13.10 [104]	13.70 [348]	1.32	595	38
8603SW	13.70 [119]	14.30 [135]	1.40	627	40
8603NSW	14.30 [135]	14.30 [135]	-	-	-
8604SW	14.30 [235]	14.90 [150]	1.47	659	42
8605SW	14.90 [150]	15.50 [165]	1.54	691	44
8606SW	15.50 [165]	16.10 [180]	1.61	723	46
8606NSW	16.10 [180]	16.10 [180]	-	-	-
8607SW	16.10 [180]	16.70 [196]	1.68	755	48
8608SW	16.70 [196]	17.30 [211]	1.75	788	50
8609SW	17.30 [211]	17.90 [226]	1.83	820	52
8610SW	17.90 [226]	18.50 [241]	1.90	852	54
8611SW	18.50 [241]	19.10 [257]	1.97	884	56
8612SW	19.10 [257]	19.70 [272]	2.04	916	58
8612NSW	19.70 [272]	19.70 [272]	-	-	-
8613SW	19.70 [272]	20.30 [287]	2.11	949	60
8614SW	20.30 [287]	20.90 [302]	2.19	981	62
8615SW	20.90 [302]	21.50 [318]	2.26	1013	64

Decorative Grate Options (Load Classifications are per DIN EN1433)

- ___ -BCD Bronze Circular Decorative Grate - Class A
- ___ -BDD Bronze Diagonal Decorative Grate - Class A
- ___ -DCD Ductile Iron Circular Decorative Grate - Class C
- ___ -DDD Ductile Iron Diagonal Decorative Grate - Class A
- ___ -DOG Ductile Iron Decorative Grate - Class A
- ___ -DWV Ductile Wave Decorative Grate - Class A
- ___ -HPB Heel-Proof Bronze Slotted Grate - Class A
- ___ -HPS Heel-Proof Stainless Steel Slotted Grate - Class A
- ___ -SCD Stainless Steel Circular Decorative Grate - Class B
- ___ -SDD Stainless Steel Diagonal Decorative Grate - Class B
- ___ -SMG Stainless Steel Mesh Grate - Class A
- ___ -SOG Stainless Steel Decorative Grate - Class B

REV.	DATE: 1/10/11	C.N. NO. 111578
DWG. NO. 302027	PRODUCT NO. Z886-HDS-LD-SW	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED