




# Z1170-151

## GREASE INTERCEPTOR W/EXTENSION, ANCHOR FLANGE, CLAMP COLLAR & HEAVY-DUTY COVER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

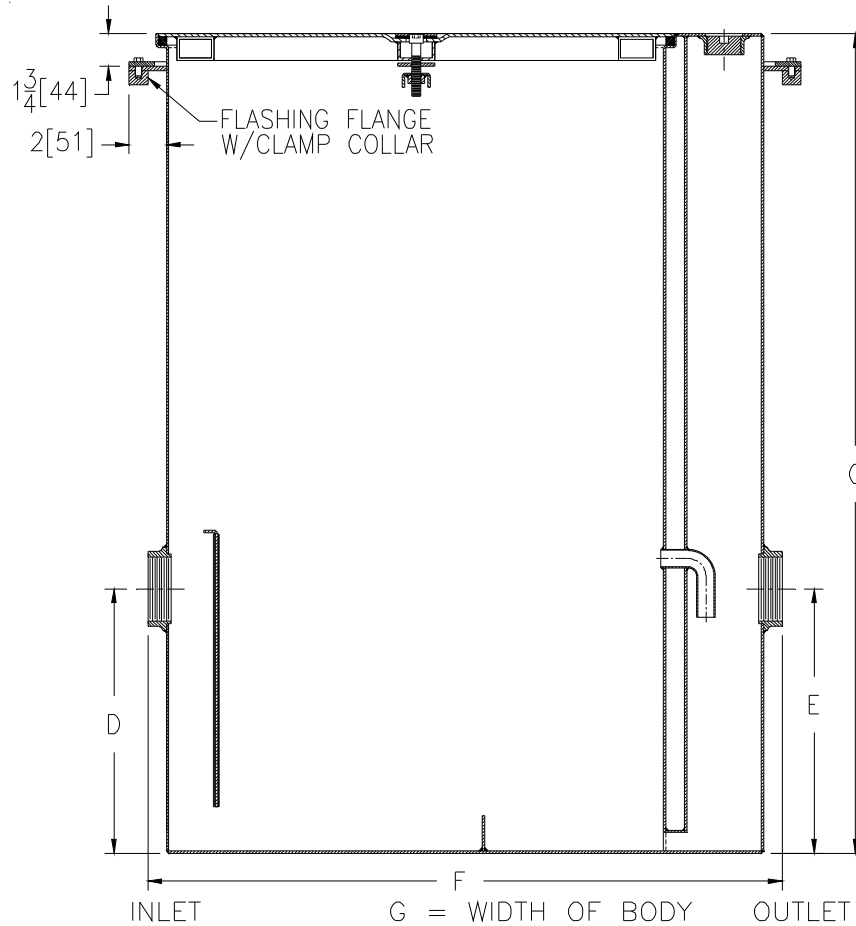

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [LPM]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
700	3 [75]	35 [132]	30 [113]	70 [32]	151 [68]	39-1/4 [997]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]

### ENGINEERING SPECIFICATION: ZURNZ1170-151

Acid Resistant Coated interior and exterior fabricated steel grease interceptor with anchor flange and clamp collar, PDI, rated at 35 GPM and 70 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle. Gasketed non-skid Heavy-Duty secured cover rated at 10,000 lbs. [4576 kg] safe live load complete with Z1108 flow control fitting. Furnished with anchor flange 1-3/4 [44mm] down from top and 2 [51mm] wide with clamp collar, and acid resistant coated interior and exterior fabricated steel extension section. Regularly furnished with a high inlet and outlet connection. Note: Location of outlet from bottom of interceptor cannot be changed.

### PREFIXES

- \_\_\_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_\_\_ ZS All Type 304 Fabricated Stainless Steel

### SUFFIXES

- \_\_\_\_\_ -L Angle type (Z1108-L) flow control device.

\*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #700 will have 4" [102mm] connections reduced to 3" [76mm] as standard. If changed, flow control must be adjusted accordingly.

\* Regularly furnished unless otherwise specified.