




# Z415T-77

SPECIFICATION SHEET

## BODY ASSEMBLY W/ "TYPE T" STRAINER & STAINLESS STEEL PERFORATED EXTENSION

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

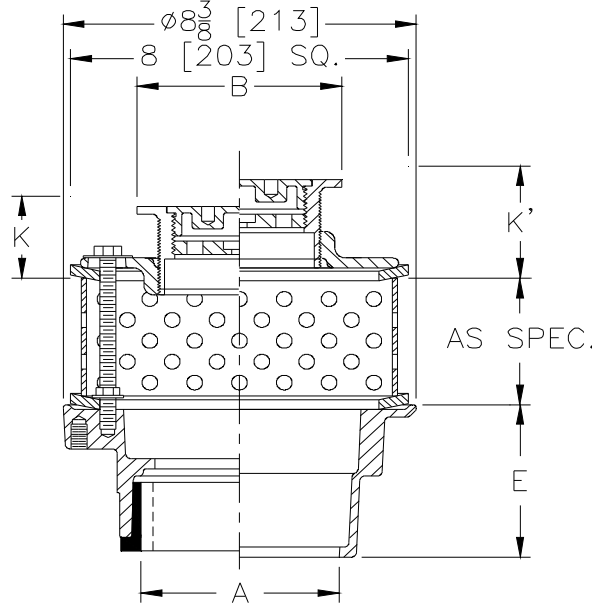

Str. Desig.	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	B Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-T5	2-3-4-6 [51-76-102-152]	5 [127]	7/8 [22]	2-1/8 [54]	1-7/8 [48]	3 [76]	12 [5]	6 [39]
-T6	2-3-4-6 [51-76-102-152]	6 [152]	7/8 [22]	2-1/8 [54]	1-7/8 [48]	3 [76]	13 [6]	7 [45]
-T7	2-3-4-6 [51-76-102-152]	7 [178]	7/8 [22]	2-1/8 [54]	1-7/8 [48]	3 [76]	14 [6]	7 [45]

**ENGINEERING SPECIFICATION:** ZURN ZN415T-77 Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with seepage slots, "TYPE T" polished nickel bronze strainer with solid secured light-duty cover, stainless steel perforated extension and secondary clamp collars.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ IC Inside Caulk
- \_\_\_\_\_ IG Inside Gasket
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ IP Threaded
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 3-7/8 [98]
- 3-7/8 [98]
- 2-3/8 [60]
- 2-5/8 [67]
- 2-7/8 [73]
- 2-3/4 [70]
- 3-7/8 [98]
- 3-3/4 [95]

**PREFIXES**

- \_\_\_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- \_\_\_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*

**SUFFIXES**

- \_\_\_\_\_ -AR Acid Resisting Epoxy Coated Cast Iron
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- \_\_\_\_\_ -SA Stabilizer Assembly (See Z1035)
- \_\_\_\_\_ -SQ Stabilizer Q-Deck (See Z1035-Q)
- \_\_\_\_\_ -SR Stabilizer Ring
- \_\_\_\_\_ -SW Spanner Wrench for Cover
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (4 [102] NL Outlet Only)
- \_\_\_\_\_ -U 1 - 3 [25 - 76] High Extension Adapter
- \_\_\_\_\_ -18 Leveling Ring (See Z400-18)
- \_\_\_\_\_ -90 90° Threaded Side Outlet Body Assembly (2 [51], 3 [76] Only)

<b>REV.</b>	<b>DATE: 11/13/12</b>	<b>C.N. NO. 124999</b>
<b>DWG. NO. 310922</b>	<b>PRODUCT NO. Z415T-77</b>	

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292