




Z-1186-91 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK AND INLET CATCH BASIN

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

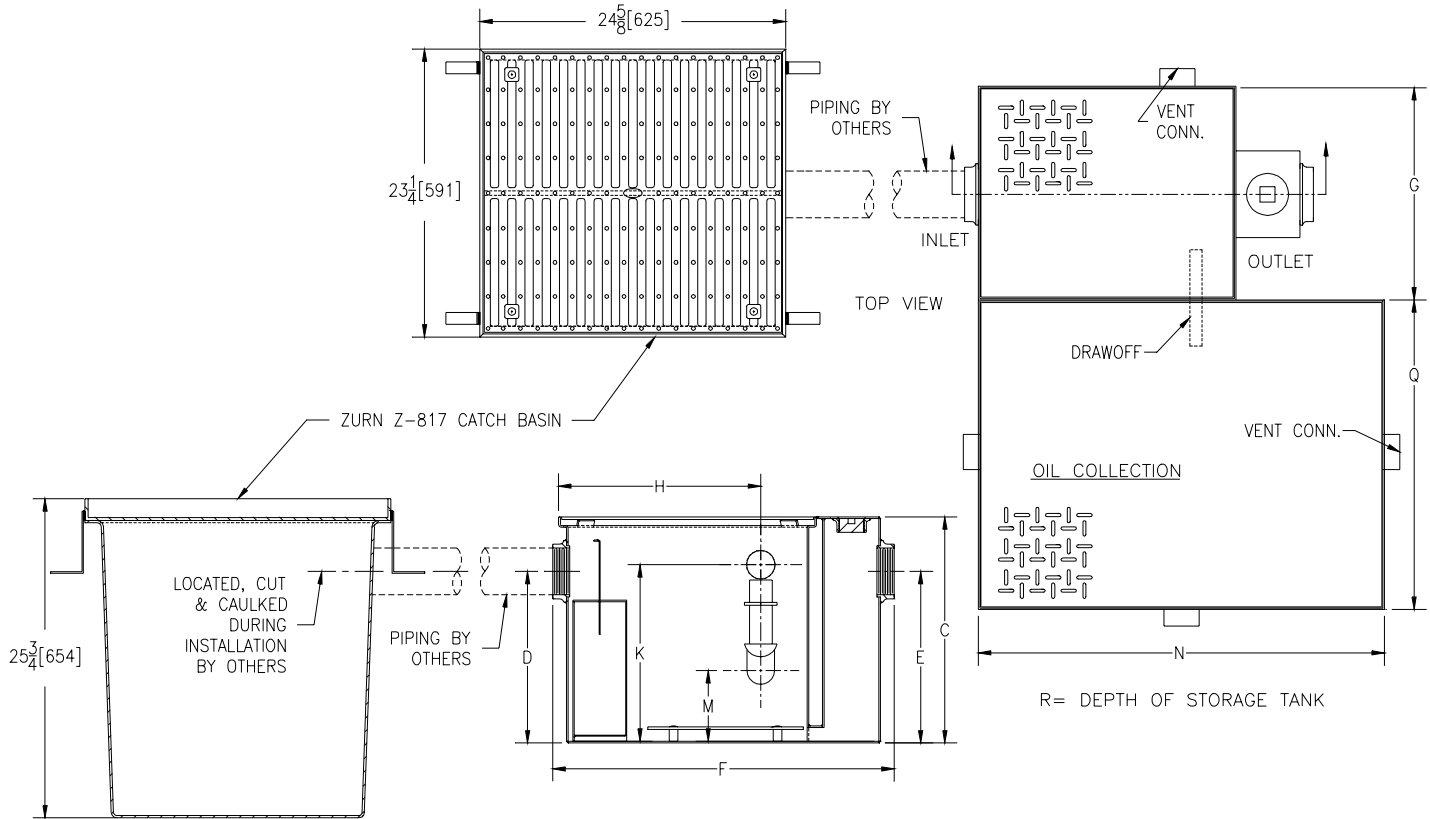

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
400	2 [51]	15 [57]	9 [34]	77 [35]	69 [261]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
400	14 [356]	8 1/4 [210]	22 3/4 [578]	14 1/8 [359]	11 5/8 [295]	11 [279]	4 7/16 [113]	30 [762]	12 [305]	55 [1397]

ENGINEERING SPECIFICATION: ZURN Z-1186-91 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position. Provided with ZURN Z-817 24[610] x 24[610] polyester catch basin with heavy duty frame and ductile grate.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ **Z-** Acid Resistant Coated Fabricated Steel

** Inlet and outlet size shown indicate standard operating size and flow control setting. Size #400 will have 3 [76] connections reduced to 2 [51] as standard. If changed, flow control and air relief by-pass must be adjusted accordingly.

REV.	DATE: 6/25/99	C.N. NO. 80592
DWG. NO. P-14625 PRODUCT NO. Z-1186-91		