




# Z1172-173

## LARGE CAPACITY GREASE INTERCEPTOR WITH HEATING ELEMENT

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

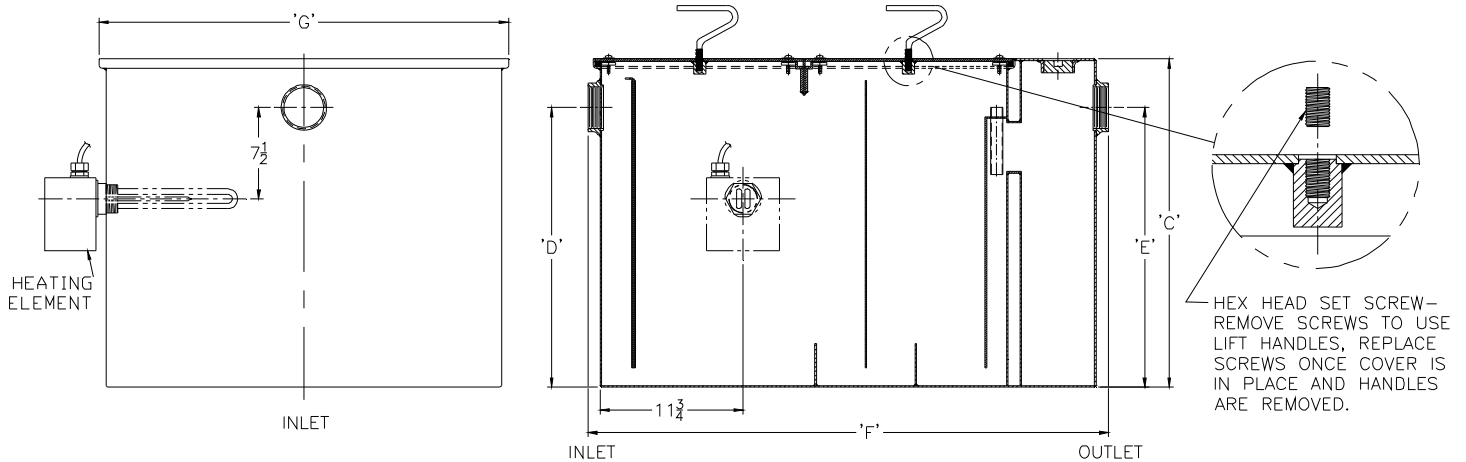

Size	Inlet/Outlet Size	Flow Rate G.P.M. [L]	Capacity		No. of Covers	Approx. Wt. Lbs. [kg]	Dimensions in Inches			
			Water Gal. [L]	Grease Lbs. [kg]			C	D/E	F	G
1000	3 [76]	100 [378]	110 [416]	200 [91]	1	408 [185]	27 [686]	23 [584]	42-3/4 [1086]	33-5/8 [854]

**ENGINEERING SPECIFICATION:** ZURN Z1172-173

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at 100 GPM and 200 Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug (which can be used as a sampling port), heating element and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position. Recommended insulation by others if used outdoors.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS All Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_ -AL Aluminum Cover
- \_\_\_ -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- \_\_\_ -HD Heavy duty traffic cover rated at 10,000 lbs. [4536 kg] maximum safe live load. An increase 'C' dim. is required when -HD option is specified. (See -HD option specification sheet)
- \_\_\_ -L Angle type (Z1108-L) flow control device.
- \_\_\_ -PW Plug Wrench

\* Regularly furnished unless otherwise specified.