




Z1188-133

LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL EXTENSION

SPECIFICATION SHEET


TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

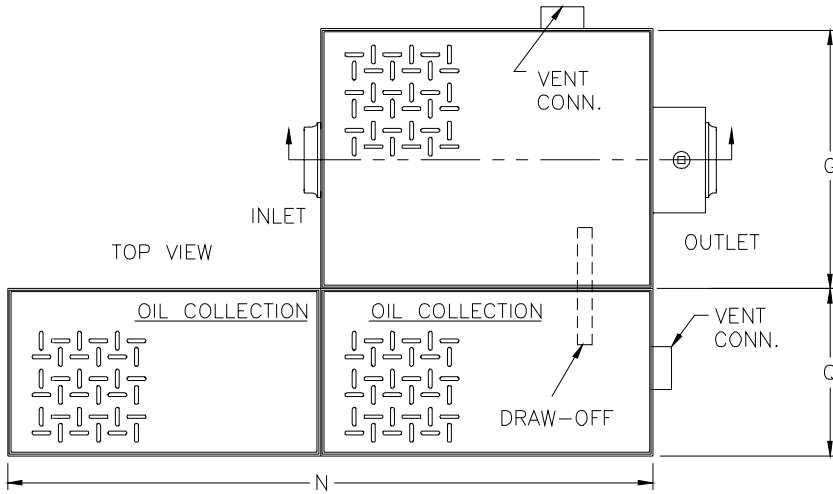

Flow Rate GPM [L] Min.	Oil Storage Tank Cap. Gal. [L]	No. of Covers	
		Trap	Tank
75 [284]	100 [379]	1	1

R = DEPTH OF STORAGE TANK
G = WIDTH OF BODY

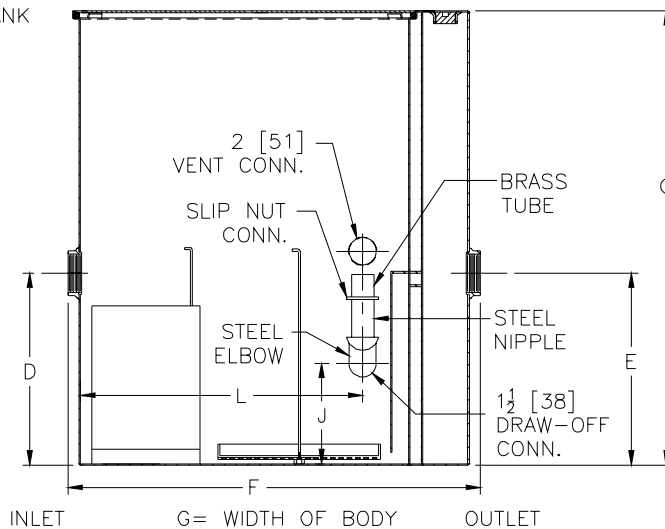

Flow Rate GPM [L] Min.	Inlet/ Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	No. of Covers	Dimensions In Inches								
					C	D/E	F	G	J	L	N	Q	R
75 [284]	3 [76]	65 [246]	967 [439]	1	42 3/4 [1086]	18 1/2 [470]	36 [914]	28 5/8 [727]	8 [203]	25 3/4 [654]	26 [660]	46 [1168]	48 5/8 [1235]

ENGINEERING SPECIFICATION: ZURN Z1188-133 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid cover complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

___ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ___ **-HD** Heavy-duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- ___ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accomodate -K.
- ___ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

REV.	DATE: 5/2/05	C.N. NO. 93296
DWG. NO. P-15147 PRODUCT NO. Z1188-133		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED