




Z415B-U

FLOOR AND SHOWER DRAIN W/ "TYPE B" STRAINER AND EXTENSION ADAPTER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

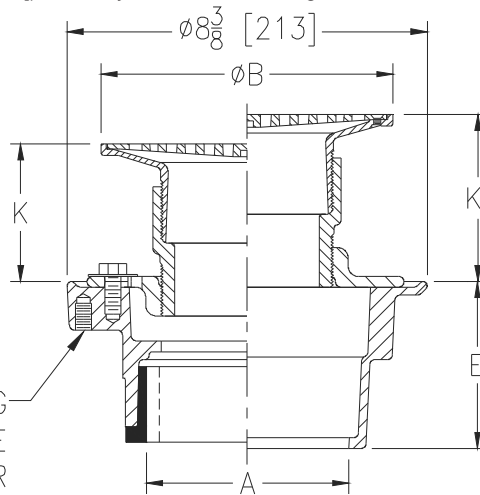

FOUR 3/8-16 UNC TAPPING
PROVIDED ON UNDERSIDE
FOR -SA, -SQ, AND -SR
SUFFIX OPTIONS ONLY

Dimensions in In [mm]						Approx Wt. lbs [kg]	Strainer Open Area in ² [cm ²]
A Pipe Size	B Strainer Dia.	K		K'			
		Min	Max	Min	Max		
2,3 [51,76]	5 [127]	2-7/16 [62]	4-1/8 [105]	3-3/8 [86]	5-1/16 [129]	11 [5]	8 [52]
2,3,4 [51,76,102]	6 [152]	2-3/4 [70]	4-3/8 [111]	3-11/16 [94]	5-5/16 [135]	13 [6]	9 [58]
2,3,4 [51,76,102]	7 [178]	3-1/16 [78]	4-3/4 [121]	4 [102]	5-11/16 [144]	14 [6]	12 [77]
3,4 [76,102]	8 [203]					16 [7]	
6 [152]						18 [8]	
6 [152]	10 [254]	3-7/16 [87]	5-1/8 [130]	4-3/8 [111]	6-1/16 [154]	22 [10]	26 [168]

ENGINEERING SPECIFICATION: ZURN ZN415B-U

Floor and shower drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, extension adaptor and adjustable collar with "TYPE B" polished nickel bronze strainer and extension adapter.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

(Specify size/type) **OUTLET**

E BODY HT. DIM.

2,3,4 [51,76,102]	_____	IC	Inside Caulk	4-3/16 [106]
2 [51]	_____	IP	Threaded	2-7/16 [62]
3 [76]	_____	IP	Threaded	2-3/4 [70]
4 [102]	_____	IP	Threaded	2-13/16 [71]
6 [152]	_____	IP	Threaded	2-7/8 [73]
2,3,4 [51,76,102]	_____	NH	No-Hub	3-13/16 [97]
2,3,4 [51,76,102]	_____	NL	Neo-Loc	3-7/8 [98]

PREFIXES

_____ ZB	D.C.C.I. Body with Polished Bronze Top
_____ ZN	D.C.C.I. Body with Polished Nickel Bronze Top*

SUFFIXES

_____ -AR	Acid Resistant Epoxy Coated Cast Iron	_____ -SA	Sabilizer Assembly (See Z1035)
_____ -CP	Chrome-Plated Bronze Top	_____ -SQ	Stabilizer Q-Deck (See Z1035-Q)
_____ -G	Galvanized Cast Iron	_____ -SR	Stabilizer Ring (See Z400-U)
_____ -HD	Heavy-Duty Slotted Grate (ZN 5,6 [127,152] only)	_____ -TC	Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
_____ -OF	Oval Funnel (See Z329-7) (6,7,8,10 [152,178,203,254] Stainers Only)	_____ -V	Backwater Valve
_____ -P	Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])	_____ -VP	Vandal Proof Secured Top
_____ -PC	Protective Cover	_____ -Y	Sediment Bucket
		_____ -4	4 [102] Diameter Funnel
		_____ -90	90° Threaded Side Outlet Body

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | Zurn Industries Limited

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. D

Date: 10/5/2017

C.N. No. 138450

Prod. | Dwg. No. Z415B-U