




# Z545-81

SPECIFICATION SHEET

## 16 [406] DIAMETER HEAVY DUTY DRAIN W/ FABRICATED BUCKET AND TRAP PRIMER

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

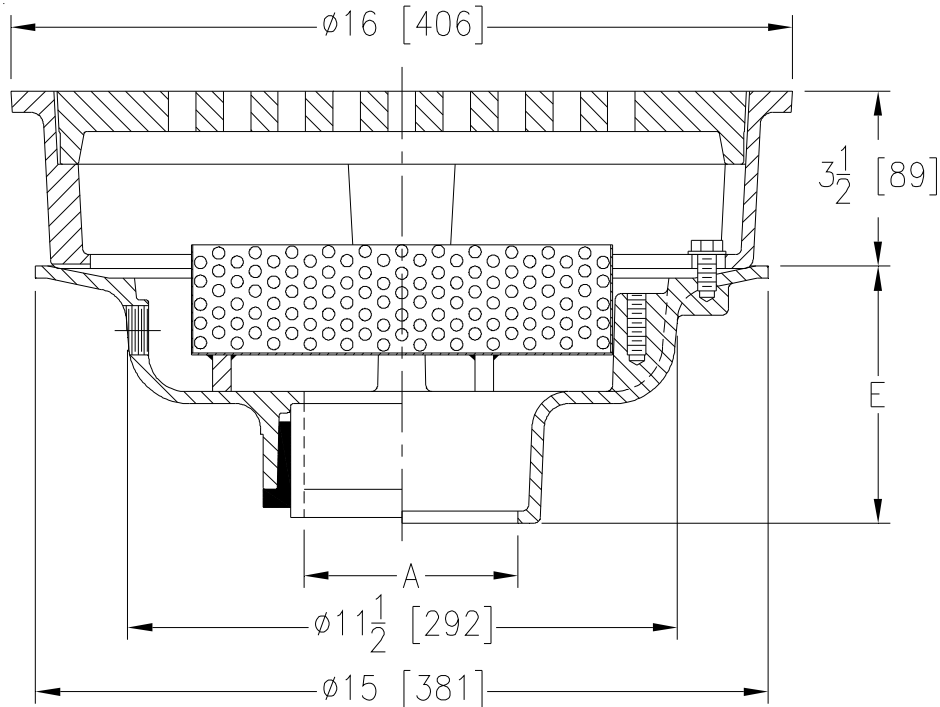

A Pipe Size	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2-3-4 [51-76-102]	69 [31]	45 [290]
5-6 [127-152]	69 [31]	

**ENGINEERING SPECIFICATION: ZURN Z545-81**  
16 [406] Diameter top drain, Dura-Coated cast iron body with bottom outlet and trap primer, seepage pan and combination membrane flashing clamp with fabricated bucket and frame for heavy-duty cast iron slotted grate.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]
- 2 thru 6 [51 thru 152]
- 2 thru 6 [51 thru 152]
- 2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

- \_\_\_ IC Inside Caulk
- \_\_\_ IG Inside Caulk w/Sealtrol Gskt.
- \_\_\_ IP Threaded
- \_\_\_ NH No-Hub
- \_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 5 1/4 [133]
- 5 1/4 [133]
- 3 3/4 [95]
- 5 1/4 [133]
- 4 5/8 [117]

**PREFIXES**

- \_\_\_ Z D.C.C.I. Body and Top\*
- \_\_\_ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 3 1/2 [89] Dim.)
- \_\_\_ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 3 1/2 [89] Dim.)

**SUFFIXES**

- \_\_\_ -DG Duresist Grate
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -TC Neo-Loc Test Cap Gasket (2 - 4 [51-102] NL Bottom Outlet Only)
- \_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_ -90 90° Threaded Side Outlet (2 - 6 [51-152])

REV.	DATE: 1/6/09	C.N. NO. 99543
DWG. NO. P-15638		PRODUCT NO. Z545-81

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED