


Z1204-ND-XB

BARIATRIC CARRIER - 1000 LB. [454KG.] ADJUSTABLE VERTICAL BACK-TO-BACK SIPHON JET NO-HUB

SPECIFICATION SHEET

TAG _____

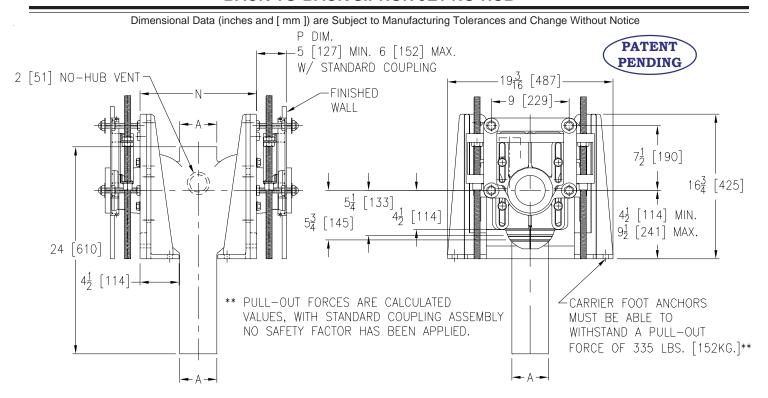

Product	Dimensions In Inches [mm]					Approx.
No.	Α	D	E	Н	N	Wt. Lbs. [kg]
Z-1204-ND4-XB	4[102]	5[127]	6-5/8[168]	5-1/2[140]	13-1/4[336]	139 [63]
Z-1204-ND5-XB	5[127]	5-1/2[140]	6-5/8[168]	6-1/2[165]	13-1/4[336]	140 [63]
Z-1204-ND6-XB	6[152]	6[152]	7-1/8[181]	6-1/2[165]	14-1/4[362]	145 [66]

Note:

- Min. 'P' Dim. Obtainable=2[51]Two 4[102] or 5[127] side inlets as indicated.
 - Feet bolted to floor using anchors capable of achieving the specified pull-out force.

ENGINEERING SPECIFICATION: ZURN Z1204-ND-XB() Adjustable, vertical siphon jet water closet "Rigid System" with () size No-Hub connections and () side inlets rated for 1000-lb. [454kg] maximum static load. Complete with Dura-Coated cast iron right and left hand fitting, with 2[51] vent, adjustable gasketed face plates, floor mounted foot supports, stud support/finishing frames corrosion resistant adjustable cast iron couplings, fixture bolts, trim, stud protectors, and bonded "Neo-Seal" gasket. Carrier complies with all applicable requirements of ASME A112.6.1M up to a 1000-Lb. [454] load.

PRODUCT/DEFINITION

Z1204-ND-XB		No-Hub Stack, Double Inlets, 2[51] Vent.				
PREFIXES						
Z	D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*					
Z Q	D.C.C.I. System with Non-Adjustable Coupling					
SUFFIXES						
G	Galvanized Cast Iron					
JJ	2[51] Auxiliary Inlet					
JL	2[51] Left Hand Auxiliary Inlet					
JR	2[51] Right Hand Auxiliary Inlet					
T	Thread	ded Stack Connection				
	(Avail	able on Restricted Basis Only)				
VP	Vandal Proof Trim					
29	29 Mechanical Test Cap Assembly					
		ously Z-1210-29)				
50		Valve Supply Support for W.C.				
		ously Z-1210-50)				
-6 1	"ZZ" C	oupling Wrench	RFV			

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 5/16/07 C.N. NO. 96628 DWG. NO. 83220 PRODUCT NO. Z1204-ND-XB