


# ZN1204-ND NARROW WALL ADJUSTABLE

VERTICAL BACK TO BACK SIPHON JET NO-HUB

## **SPECIFICATION SHEET**

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

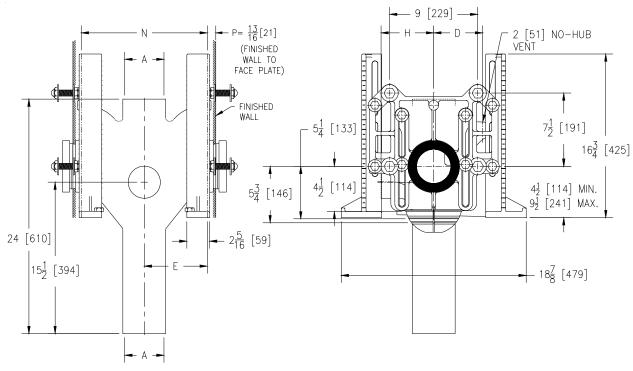

#### Note:

1. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.

Product		Approx. Wt.Lbs.				
No.	Α	D	E	Н	N	[kg]
ZN1204ND4	4[102]	5 [127]	6 5/8 [168]	5 1/2 [140]	13 1/4 [336]	134 [61]
ZN1204ND5	5[127]	5 1/2[140]	6 5/8 [168]	6 1/2 [165]	13 1/4 [336]	140 [64]
ZN1204ND6	6[152]	6 [152]	7 1/8 [181]	6 1/2 [165]	14 1/4 [362]	145 [66]

### **ENGINEERING SPECIFICATION: ZURN ZN1204-ND**

Narrow Wall Adjustable, vertical siphon jet water closet "Rigid System" with 4 [102], 5 [127], or 6 [152] No-Hub connections and () side inlets. Complete with Dura-Coated cast iron double main fitting, with 2 [51] vent, adjustable gasketed chase saver faceplates, universal floor mounted foot supports, corrosion resistant adjustable ABS couplings with integral test cap, fixture bolts, trim, stud protectors and bonded "Neo-Seal" gaskets.

## PRODUCT/DEFINITION

ZN1204-ND No-Hub Stack, Double Inlet, 2 [51] Right Hand Vent.

		and vont.			
PREFIXES  Z ZQ	D.C.C.I. System with Zurn "ZZ" 2 [51] Coupling* D.C.C.I. System with NPT Faceplate, Non-Adjust	table Coupli	ng		
SUFFIXES	Blowout Type Fixture Support Galvanized Cast Iron Two 2 [51] Auxiliary Inlet 2 [51] Left Hand Auxiliary Inlet 2 [51] Right Hand Auxiliary Inlet Vandal-Proof Trim	X4 50 61	Flush Val		ion Assembly Support for Water Closets h
X3	3" [76] Foot Extension Assembly	REV. C	DATE:	1/25/07	C.N. NO. 96112
*BEGLILARI V ELIRNISHED LINI ESS OTHERWISE SPECIFIED			67648	PRODUC	CTNO 7N1204-ND