





# Z888-6-EXT

## SLOTTED DRAINAGE SYSTEM WITH 4 [102] EXTENSION

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

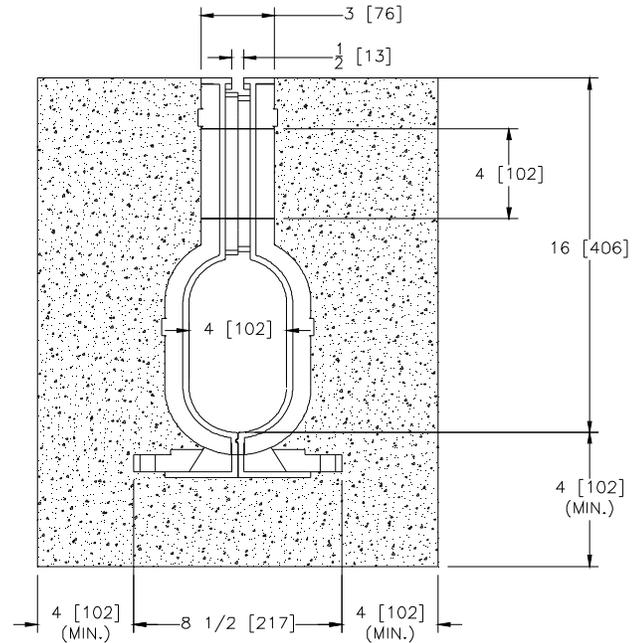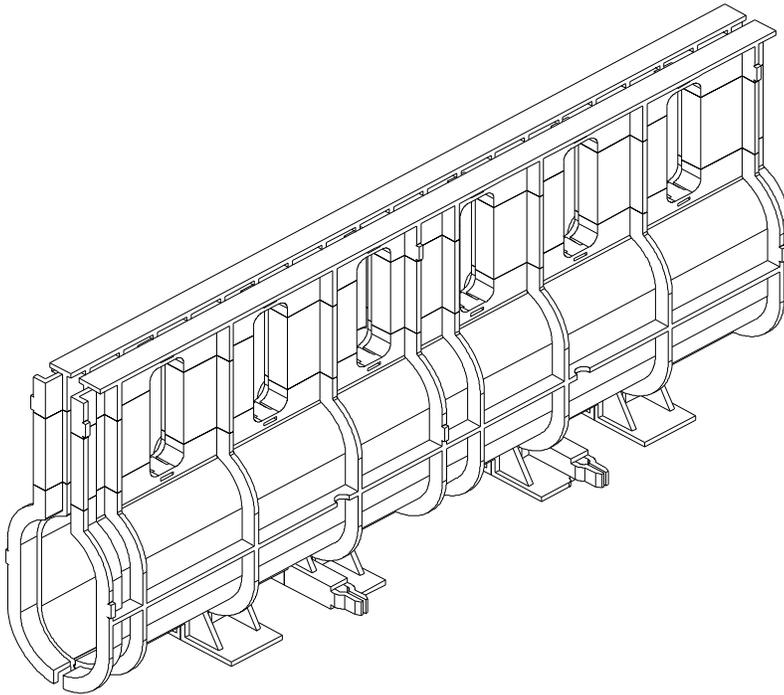

### ENGINEERING SPECIFICATION: Zurn Z888-6-EXT

Slot drain shall be 40 [1016] long with 4 [102] throat, a 1/2 [13] slot opening (ADA compliant), and a 4 [102] extension. Drain shall be made of (HDPE) High Density Polyethylene, and is UV-10 stabilized. Drain shall have rebar clips molded onto bedding feet and/or bedding feet shall be used for positioning and anchoring purposes. Overlap connection shall be interlocked.

### PREFIXES

\_\_\_ Z High Density Polyethylene Trench with Integral Top Frame\*

### SUFFIXES

- \_\_\_ -E1 Closed End Cap
- \_\_\_ -E2 2 [51] No-Hub End Outlet
- \_\_\_ -E3 3 [76] No-Hub End Outlet
- \_\_\_ -E4 4 [102] No-Hub End Outlet
- \_\_\_ -E6 6 [152] No-Hub End Outlet
- \_\_\_ -PVSS Stainless Steel Frame with Slot
- \_\_\_ -T4/6 Transition from -4 to -6
- \_\_\_ -T6/8 Transition from -6 to -8
- \_\_\_ -WS25 1/4 [6] Wide Heel-Proof Slots
- \_\_\_ -WS75 3/4 [19] Wide Slots

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 09/20/13 C.N. NO. 129970

PROD./DWG. NO. Z888-6-EXT