




Z1172-142

SIZE #1700 LARGE CAPACITY GREASE INTERCEPTOR WITH EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

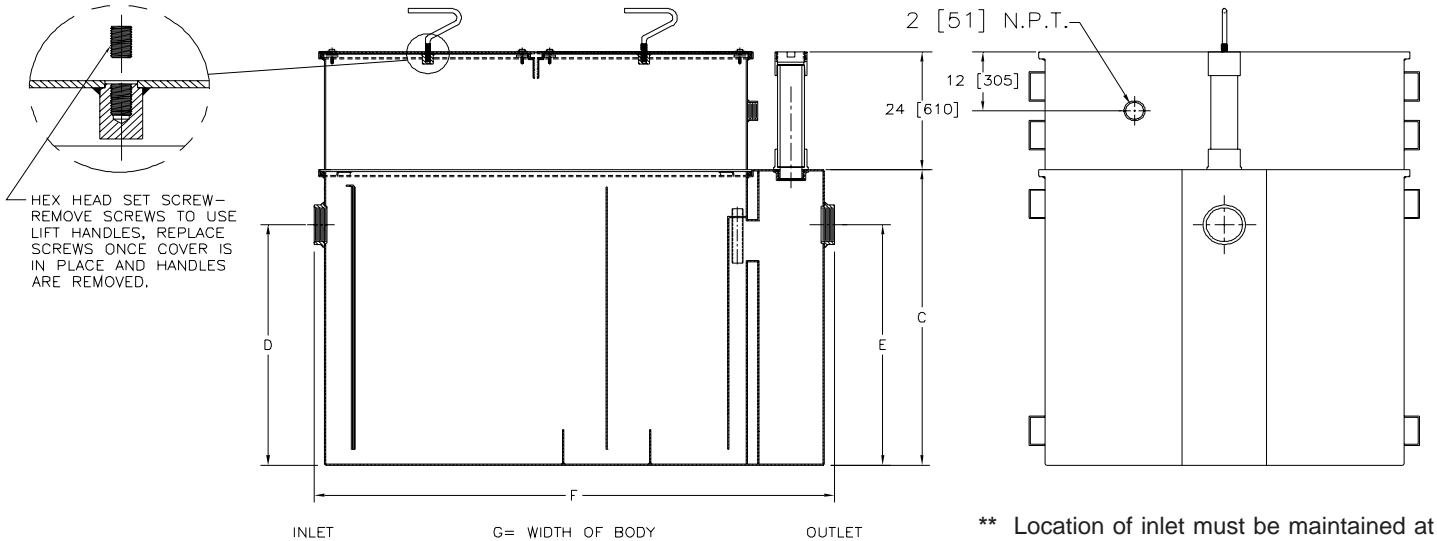

| Size | Inlet/Outlet Size** | Flow Rate G.P.M. [L] | Capacity | | No. of Covers | Approx. Wt. Lbs. [kg] | Dimensions in Inches | | | |
|------|---------------------|----------------------|----------------|------------------|---------------|-----------------------|----------------------|---------------|-----------|-----------|
| | | | Water Gal. [L] | Grease Lbs. [kg] | | | C # | D/E | F | G |
| 1700 | 4 [102] | 400 [1512] | 1095 [4139] | 800 [363] | 3 | 2440 [1108] | 54 1/4 [1378] | 46 5/8 [1184] | 94 [2388] | 67 [1702] |

ENGINEERING SPECIFICATION: ZURN Z1172-142

Large capacity Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at ___ GPM and ___ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover with removable lift handles, complete with flow control fitting, and acid resistant coated interior and exterior fabricated steel retro-fit extension section with access port (Specify "C" Dimension Required). Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -AL Aluminum cover
- ___ -L Angle type (Z1108-L) flow control device.

'C' Dimension shown is standard interceptor height.
Add extension height needed to obtain overall 'C' as specified.

| | | |
|------------------|-----------------------|----------------|
| REV. | DATE: 02/07/07 | C.N. NO. 96171 |
| DWG. NO. P-15377 | PRODUCT NO. Z1172-142 | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED