




# Z100-368

## ROOF DRAIN WITH GASKETED STANDPIPE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

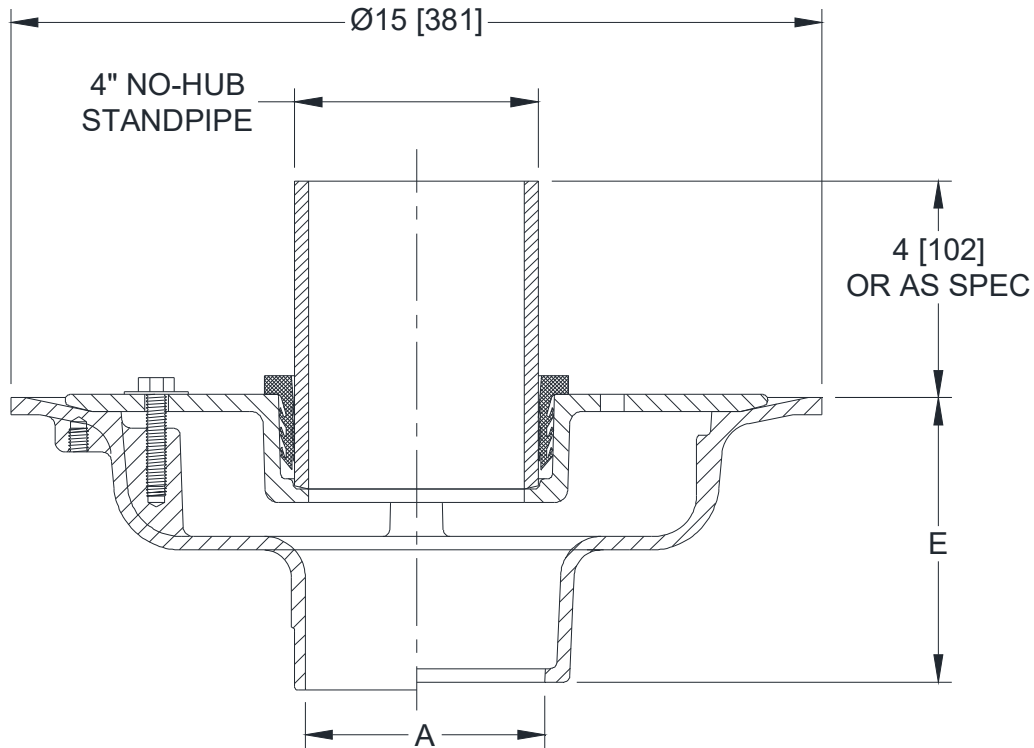

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]
2, 3, 4 [51, 76, 102]	64[29]
6 [152]	64[29]

### ENGINEERING SPECIFICATION: ZURN Z100-386

Floating slab drain, Dura-Coated cast iron lower body, clamp collar with weep holes, neoprene flex gasket, and threaded\* standpipe.

### OPTIONS (Check/specify appropriate options)

#### PIPE SIZE

2, 3, 4, 6 [51, 76, 102, 152]  
2, 3, 4 [51, 76, 102]

#### (Specify size/type) OUTLET

\_\_\_ NH No-Hub  
\_\_\_ NL Neo-Loc

#### 'E' BODY HT. DIM.

5-1/4 [133]  
4-5/8 [117]

#### PREFIXES

\_\_\_ Z D.C.C.I. Body and Top\*  
\_\_\_ ZN D.C.C.I Body w/ Polished Nickel Bronze Top (Add 3/16 [5] to 4-15/16 [125] Dim)

#### SUFFIXES

\_\_\_ -AC Angular Underdeck Clamp  
\_\_\_ -AR Acid Resistant Epoxy Coated  
\_\_\_ -C Underdeck Clamp  
\_\_\_ -DP Top-Set® Roof Deck Plate  
(Replaces both -C and -R)  
\_\_\_ -G Galvanized Cast Iron  
\_\_\_ -R Roof Sump Receiver  
\_\_\_ -90 90° Threaded Side Outlet Body

\* Regularly furnished unless otherwise specified.