




# Z125-111

8-3/8 [213] DIAMETER GALVANIZED ROOF DRAIN W/ LOW SILHOUETTE DOME AND STAINLESS STEEL PERFORATED EXTENSION AND TOP FRAME W/ ANTI-TILT, LOOSE-SET SLOTTED GRATE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

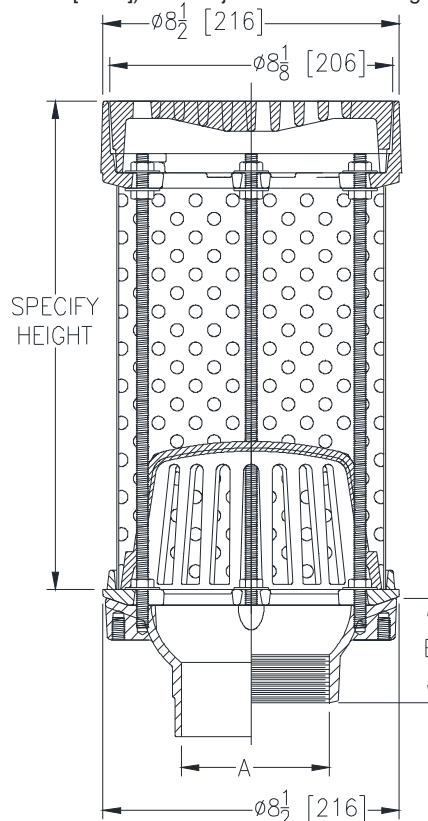

A Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm <sup>2</sup> ]
2-3-4 [51-76-102]	25 [11]	13 [66]

**ENGINEERING SPECIFICATION: ZURN Z125-111**  
 8-3/8 [213] Diameter roof drain, galvanized cast iron body with combination membrane flashing clamp/gravel guard and low silhouette Poly-Dome, stainless steel perforated extension, and galvanized top frame with loose set, anti-tilt galvanized slotted grate.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2-3-4 [51-76-102]
- 2 [51]
- 3 [76]
- 4 [102]
- 2-3-4 [51-76-102]
- 2-3-4 [51-76-102]

(Specify size/type) **OUTLET**

- \_\_\_ IC Inside Caulk
- \_\_\_ IP Threaded
- \_\_\_ IP Threaded
- \_\_\_ IP Threaded
- \_\_\_ NH No-Hub
- \_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 3-7/8 [98]
- 2-7/16 [62]
- 2-3/4 [70]
- 3 [76]
- 4 [102]
- 3-13/16 [97]

**PREFIXES**

- \_\_\_ Z Galvanized Cast Iron Body with Poly-Dome (4-1/4 [108] Dome Height)\*

**SUFFIXES**

- \_\_\_ -C Underdeck Clamp
- \_\_\_ -DP Top-Set® Roof Deck Plate  
(Replaces both the -C and -R)
- \_\_\_ -DR Top-Set® Drain Riser
- \_\_\_ -EB Top-Set® Adjustable Extension Assembly
- \_\_\_ -R Roof Sump Receiver
- \_\_\_ -TC Neo-Loc Test Cap Gasket  
(2 - 4 [51 - 102] NL Bottom Outlet Only)
- \_\_\_ -XJ Vertical Expansion Joint (See Z190)
- \_\_\_ -90 90° Threaded Side Outlet Body  
(2 - 4 [51 - 102]) (Previously Z126)

\* Regularly furnished unless otherwise specified.