




# Z-1181-84 SOLIDS INTERCEPTOR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

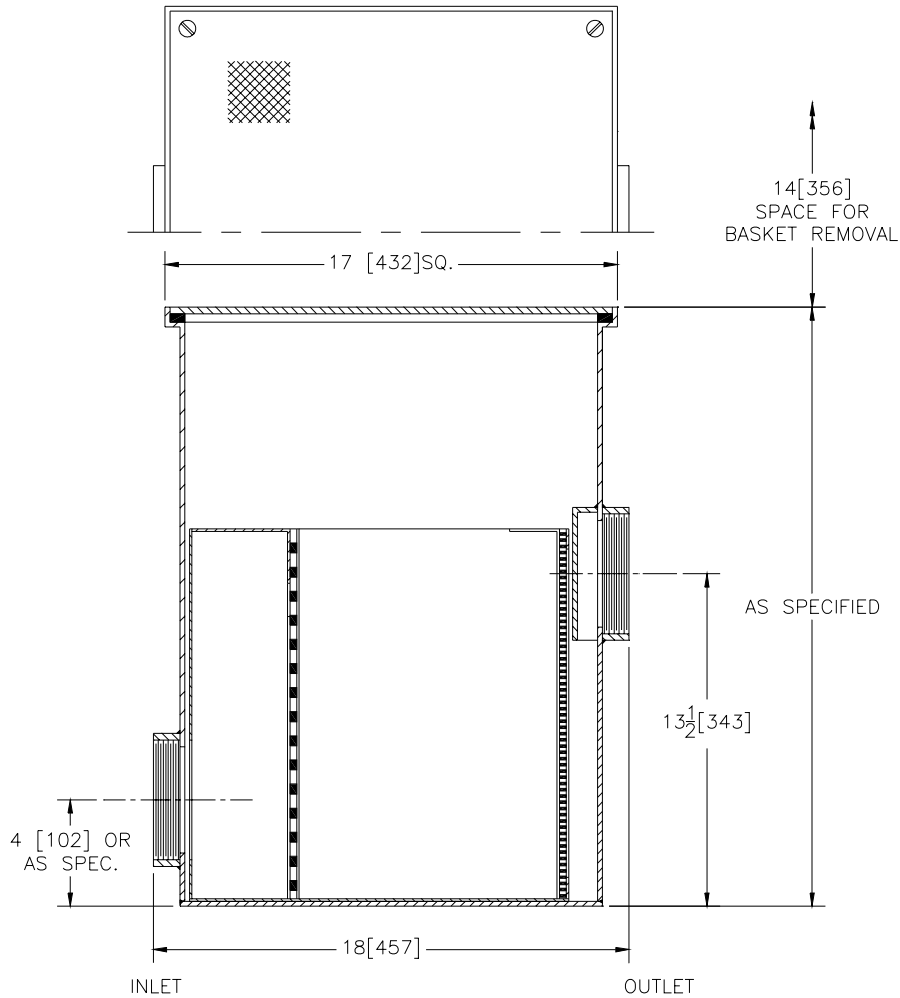

Inlet/Outlet Inches	Flow Rate GPM [L]	Approx. Wt. Lbs. [kg]
4 [102]	100 [378]	T.B.D.

**ENGINEERING SPECIFICATION:** ZURN Z-1181-84 Large capacity Acid Resistant Coated fabricated steel solids interceptor, in lieu of fixture 'P' trap, for on-floor or flush with floor installation, with removable primary and secondary flow diffusing/intercepting screens, and sediment bucket, with gasketed non-skid cover. Regularly furnished with 4 [102] low inlet and high outlet.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

- \_\_\_ Z- Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS- All Fabricated Type 304 Stainless Steel

**SUFFIXES**

- \_\_\_ -SS Custom Stainless Mesh Screen for Bucket (Specify opening size)
- \_\_\_ -YR Replacement Basket Assembly

REV. A	DATE: 7/12/02	C.N. NO. 89664
DWG. NO. P-14878 PRODUCT NO. Z-1181-84		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED