




Z-1173-TD-R

GREASE INTERCEPTOR WITH GREASE ACCUMULATING CONE, INLINE SHUTOFF VALVE, AND RECESSING RECEIVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

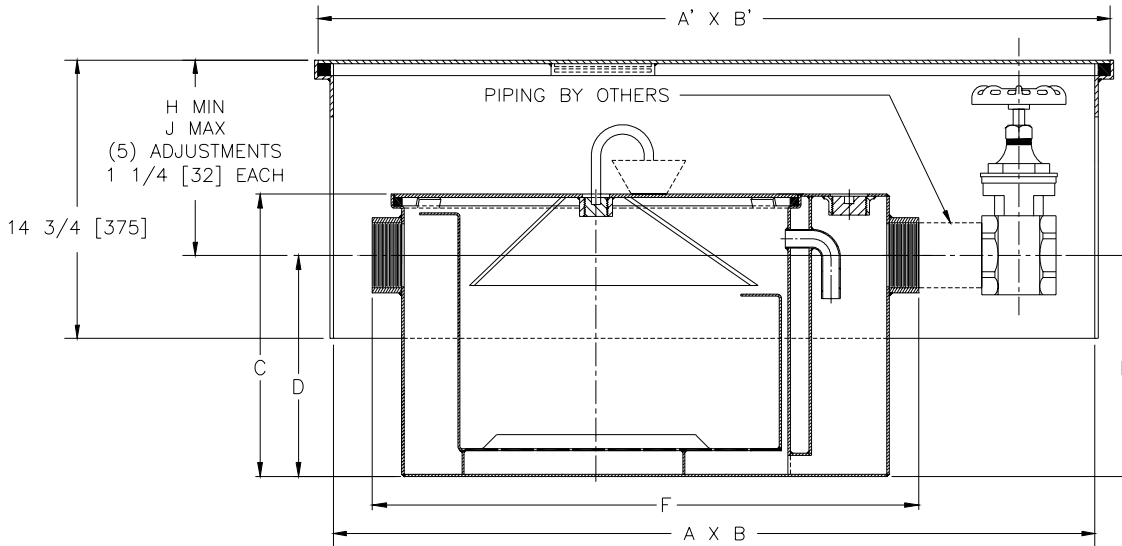

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]
			Water Gal. [L]	Grease Lbs. [kg]	
200	2[51]	7 [26]	5 [19]	14 [6]	138 [63]
300	2[51]	10 [38]	6 [23]	20 [9]	163 [74]
400	3[76]	15 [57]	10 [38]	30 [14]	190 [86]
500	3[76]	20 [76]	16 [61]	40 [18]	215 [98]

Size	Inlet/Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]
			Water Gal. [L]	Grease Lbs. [kg]	
600	3[76]	25 [95]	21 [79]	50 [23]	251 [114]
700	3[76]	35 [132]	30 [114]	70 [32]	290 [132]
800	3[76]	50 [189]	40 [151]	100 [45]	330 [150]
900	3[76]	75 [284]	65 [246]	150 [68]	372 [169]

Dimensions in Inches [mm]										
Size	A	A'	B	B'	C	D/E	F	G	H	J
200	36 3/4[933]	38 3/4[984]	15 3/8[391]	17 3/8[441]	11 1/4[286]	8 1/8[206]	21 3/4[552]	11 7/8[302]	5 1/8[130]	11 3/8[289]
300	40 1/8[1019]	42 1/8[1070]	17 1/2[445]	19 1/2[495]	11 3/4[298]	8 1/4[210]	25 1/8[638]	14 [356]	5 1/2[140]	11 3/4[298]
400	42 1/8[1070]	44 1/8[1121]	20[508]	22[559]	13 3/8[340]	9 3/8[238]	27 1/8[689]	16 3/4[425]	6[152]	12 1/4[311]
500	45[1143]	47[1194]	20 3/4[527]	22 3/4[578]	15[381]	11 3/4[298]	30[762]	17 1/4[438]	5 1/4[133]	11 1/2[292]
600	47 1/4[1200]	49 1/4[1251]	23 1/4[591]	25 1/4[641]	17[432]	12 1/2[318]	32 1/4[819]	19 7/8[505]	6 1/2[165]	12 3/4[324]
700	49 1/8[1248]	51 1/8[1299]	26[660]	28[711]	18 3/4[476]	14 1/4[362]	34 1/8[867]	22 1/2[572]	6 1/2[165]	12 3/4[324]
800	51[1295]	53[1346]	28[711]	30[762]	21 1/2[546]	16[406]	36[914]	24 1/2[622]	7 1/2[191]	13 3/4[349]
900	51[1295]	53[1346]	32[813]	34[864]	22 3/4[578]	18 1/2[470]	36[914]	28 5/8[727]	6 1/4[159]	12 1/2[318]

ENGINEERING SPECIFICATION: ZURN Z-1173-TD-R Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at _____ GPM and _____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Gasketed non-skid secured cover with draw off port having bronze plug, grease accumulating cone, NPT to hose adaptor, 2' [610] flexible hose, hose clamp, and an in line closure valve. Complete with Acid Resistant Coated interior and exterior fabricated steel recessing receiver with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle and Z-1108 Flow Control Fitting. Regularly furnished inlet and outlet in high position. Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

_____ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -L Angle type (Z-1108-L) flow control device with plunger (no additional charge).
- _____ -RE Acid Resistant Coated interior and exterior fabricated steel recessing receiver, enclosed type, for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. Size #300 will have 3[75] connections reduced to 2[50] and sizes #600 thru #900 will have 4[100] connections reduced to 3[75] as standard. If changed, flow control must be adjusted accordingly.

REV.	DATE: 8/13/02	C.N. NO. 89758
DWG. NO. 67023		PRODUCT NO. Z-1173-TD-R

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED