





# Z1186-120 OIL INTERCEPTOR W/ INTEGRAL STORAGE TANK

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

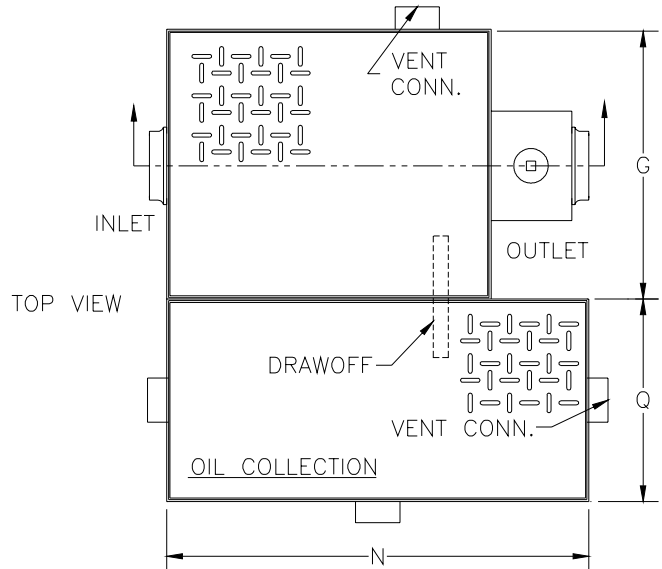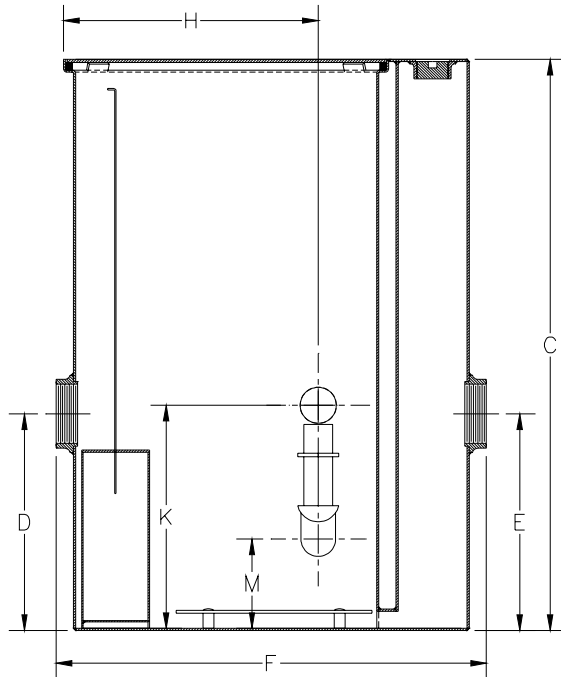

R= DEPTH OF STORAGE TANK

SIZE	Inlet/Outlet Size**	Flow Rate G.P.M.	Water Capacity Gal.[L]	Approx. Wt. Lbs.[kg]	Oil Storage Tank Capacity Gal.[L]
700	3 [76]	35 [132]	21 [79]	805 [365]	300 [1136]

Dimensions in inches										
SIZE	C	D/E	F	G	H	K	M	N	Q	R
700	36 1/2 [927]	12 1/2 [318]	29 7/8 [759]	19 7/8 [505]	16 3/8 [416]	16 3/4 [425]	6 7/16 [164]	30 [762]	48 [1219]	79 3/16 [2011]

**ENGINEERING SPECIFICATION:** ZURN Z1186-120 Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, oil drawoff, vent connections, secured gasketed non-skid cover, complete with flow control fitting and integral storage tank. Regularly furnished with inlet and outlet in high position.

**OPTIONS** (Check/specify appropriate options)

**PREFIXES**

\_\_\_\_\_ **Z** Acid Resistant Coated Fabricated Steel\*

\*\* Inlet and outlet size shown indicates standard operating size and flow control setting. Size #700 will have 4 [102] connections reduced to 3 [76] as standard.

REV.	DATE: 8/17/05	C.N. NO. 93705
DWG. NO. P-15191 PRODUCT NO. Z1186-120		

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED