




Z1174-78
ADJUSTABLE RECESSING RECEIVER FOR COMBINED
GREASE AND SOLIDS INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

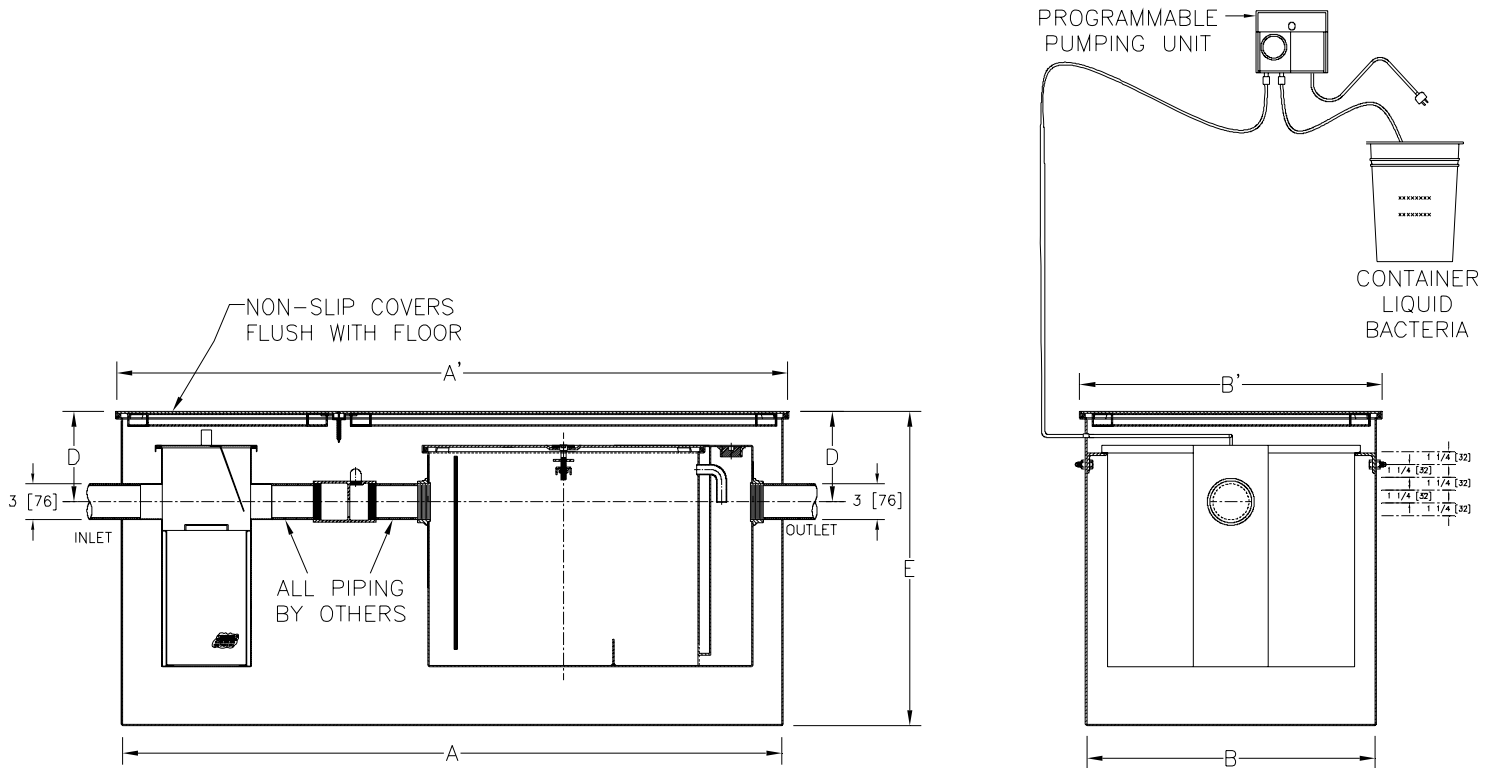

Size	Dimensions In Inches [mm]					
	A	A'	B	B'	D	E
800	64 [1626]	65 3/8 [1660]	28 5/8 [727]	30 [762]	8 3/4 [222]	30 1/2 [775]

ENGINEERING SPECIFICATION: ZURN
 Z1174-78 Acid Resistant Epoxy Coated Recessing receiver, enclosed type, equipped with adjustable support brackets and gasketed aluminum non-skid cover. Complete with Z1174 Grease Interceptor and Z1183 Solids Interceptor. For interceptor specifications see Z1174 & Z1183 specification sheets.

PREFIXES

____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

- ____ **-K** Anchor flange 1-3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K) option is specified.
- ____ **-KC** Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. A 3 [76] minimum extension height is required when anchor flange (-KC) option is specified.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 5/16/08	C.N. NO. 98516
DWG. NO. P-15549 PRODUCT NO. Z1174-78		