




Z-1173-92
EJECTO-MATIC GREASEPTOR AND
ADJUSTABLE ENCLOSED
RECESSING RECEIVER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

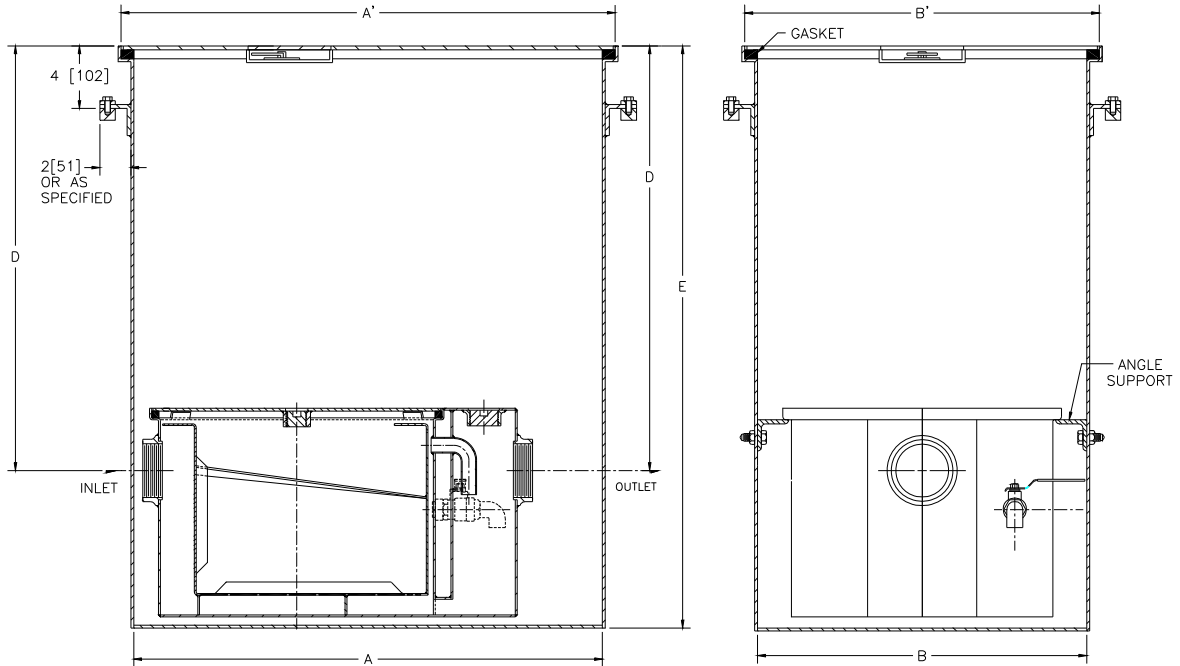

Size	Dimensions in Inches					
	A	A'	B	B'	D	E
600	39 1/2 [1003]	41 1/2 [1054]	23 1/4 [591]	25 1/4 [641]	27 1/4 [692]	40 7/8 [1038]

ENGINEERING SPECIFICATION: ZURN Z-1173-92 Acid Resistant Coated Fabricated Steel Greaseptor and recessing receiver, enclosed type, for recessed installations, furnished with adjustable support brackets, anchor flange 2 [51] wide with clamp collar, and gasketed non-skid cover with recessed and covered lift handle. Complete with Z1108 Flow Control Fitting and Z-1173 Greaseptor (for greaseptor specifications see Z-1173 drawing).

PREFIXES

_____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

_____ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide.

_____ **-T** Cover recessed for tile/terrazzo. (Specify required recess depth - 1/8 [3], 3/4 [19], or 1 1/4 [32]).

REV. A	DATE: 11/23/99	C.N. NO. 84019
DWG. NO. P-14611 PRODUCT NO. Z-1173-92		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED