




Z-1188-115

LARGE CAPACITY OIL INTERCEPTOR W/ INTEGRAL EXTENSION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

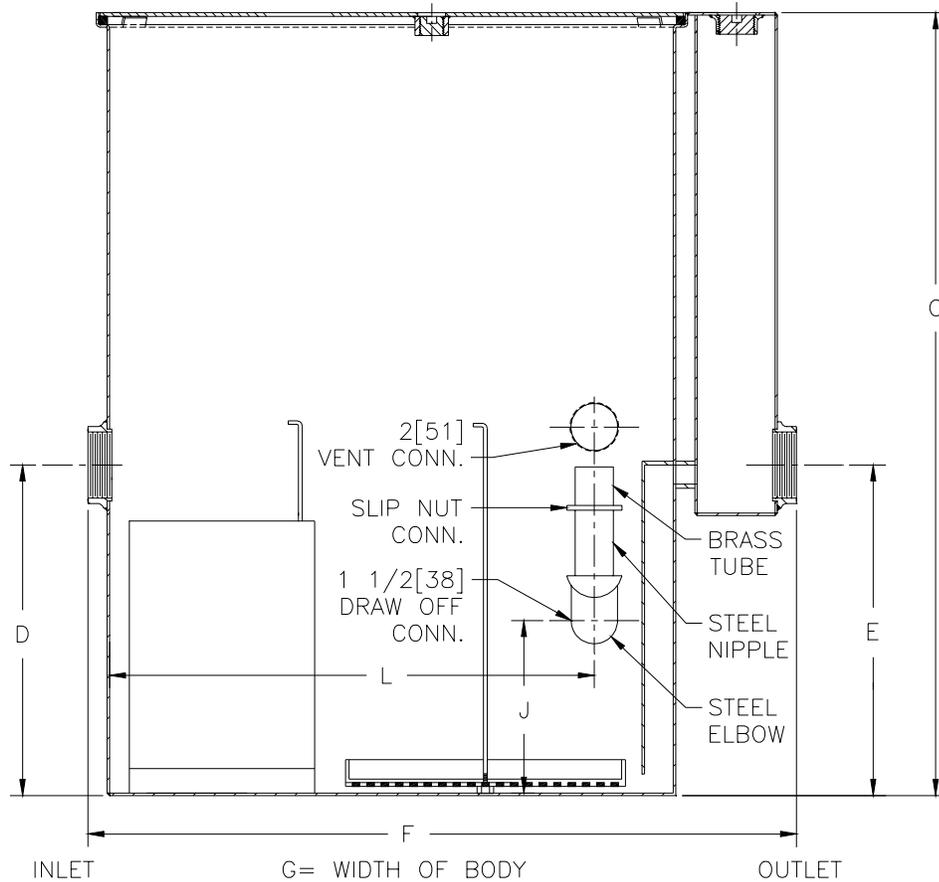

Flow Rate GPM[L]Min	Inlet/Outlet Size**	Water Capacity Gal. [L]	App.Wt. Lbs. [Kg]	No. of Covers	Dimensions In Inches					
					C	D/E	F	G	J	L
75 [284]	3 [75]	65 [246]	422 [191]	1	40 3/4 [1035]	18 1/2 [470]	36 [914]	28 5/8 [727]	8 [203]	25 3/4 [654]

ENGINEERING SPECIFICATION: ZURN Z-1188-115 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor with integral extension, internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side. Secured gasketed non-skid cover complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

_____ Z- Acid Resistant Coated Fabricated Steel*

SUFFIXES

- _____ -HD Heavy duty traffic cover rated at 10,000 lbs [4536] kg. maximum safe live load.
- _____ -K Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide. No extension required to accomodate -K.
- _____ -KC Anchor flange 1 3/4 [44] mm down from top and 2 [51] mm wide with clamp collar.

REV.	DATE: 8/24/01	C.N. NO. 87799
DWG. NO. P-14845	PRODUCT NO. Z-1188-115	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED