




Z1203-ND4-F

ADJUSTABLE HORIZONTAL BACK TO BACK SIPHON
JET NO-HUB W/ FLOOR MOUNTED, BACK OUTLET
FIXTURE SUPPORT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

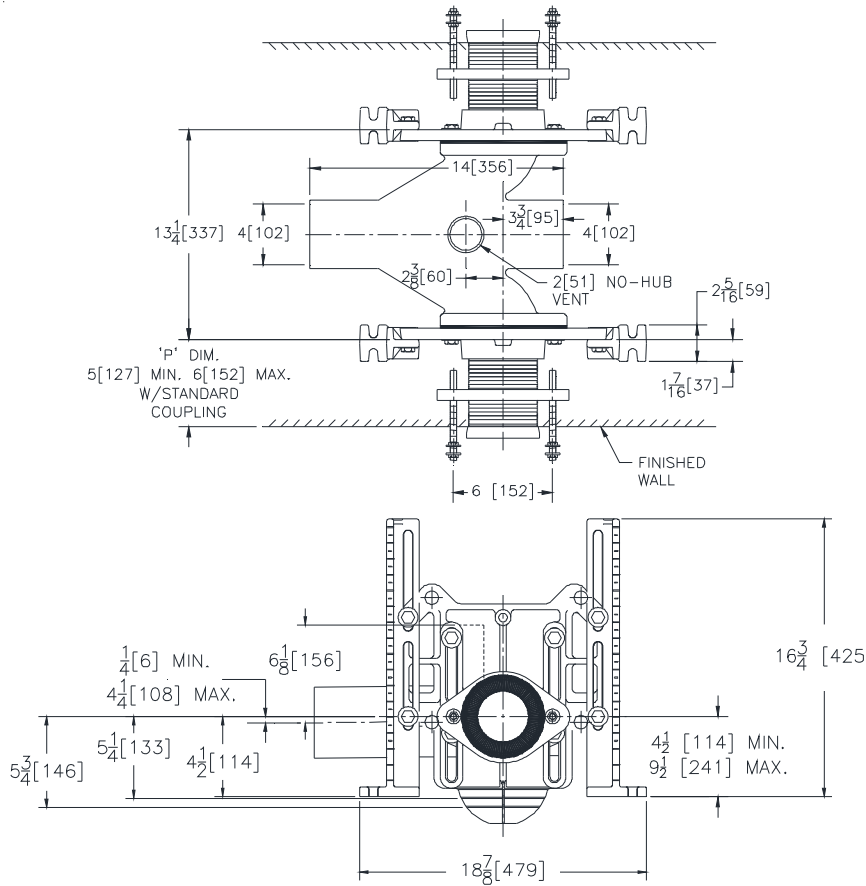

Product Number	Approx. Wt. Lbs. [kg]
Z1203-ND4-F	120 [51]

Note:

1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.

ENGINEERING SPECIFICATION: ZURN Z1203-ND4-F

Adjustable, horizontal siphon jet water closet "Rigid System" with 4" [102mm] No-Hub connections. Complete with Dura-Coated cast iron double main fitting, with 2" [51mm] vent, adjustable gasketed face plates, universal floor mounted foot supports, corrosion resistant adjustable ABS couplings with integral test cap, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gaskets and floor mount, back outlet fixture support.

OPTIONS (Check/specify appropriate options)

_____ Z1203-ND4-F 4 [102] No-Hub Back to Back Inlet (Double)

PREFIXES

- _____ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
- _____ ZQ D.C.C.I. System with Non-Adjustable Coupling

SUFFIXES

- _____ -A Auxiliary Support Assembly (for 'P' Dim. Greater Than 18 [457])
- _____ -CC Corrosion Resistant 6 [152] Long Cast Iron Coupling
- _____ -CL Coupling Length Other Than Standard 6 [152] (Specify Length Required)
- _____ -JC 2 [51] Auxiliary Inlet with Sanitary Sweep
- _____ -M Auxiliary Foot Support (for 'P' Dim. 10 - 18 [254 - 457])
- _____ -PF Pre-Fab Foot
- _____ -PS Pre-Fab Slotted Foot
- _____ -RYK Unistrut Pre-Fab Foot
- _____ -VP Vandal Proof Trim
- _____ -X3 3 [76] Foot Extension Assembly (See Z1200-FT-EXT-3)
- _____ -X4 4 [102] Foot Extension Assembly (See Z1200-FT-EXT-4)
- _____ -50 Flush Valve Supply Support for Water Closets (See Z1200-SPLY-SPRT-WC)

* Regularly furnished unless otherwise specified.