




Z-509-79

14" [356] HEAVY DUTY DRAIN

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

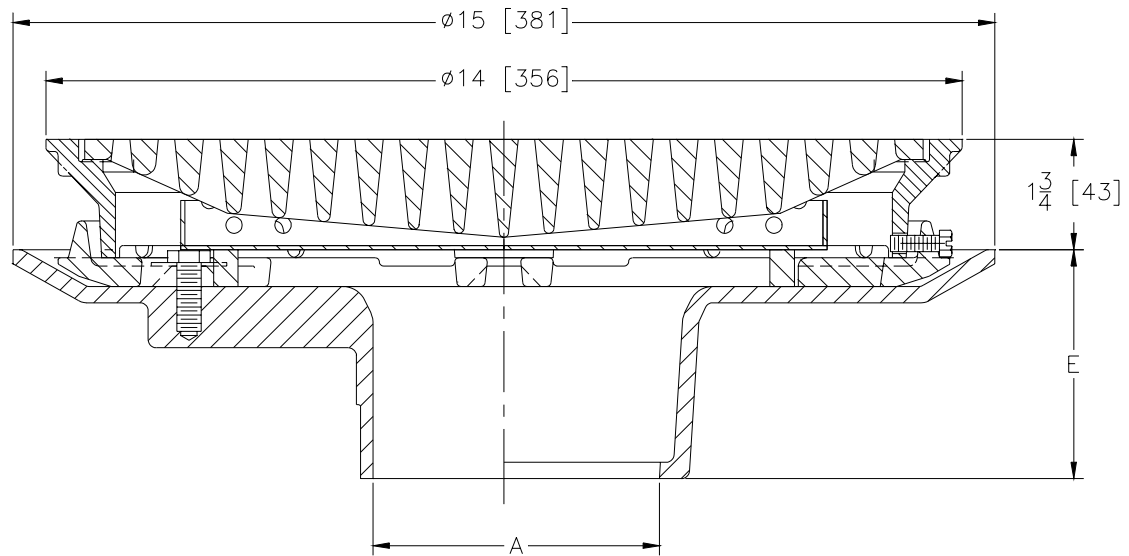

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
3-4-6 [75-100-150]	38 [17]	44 [284]

ENGINEERING SPECIFICATION: ZURN Z-509 14 [356] Square top drain. Dura-Coated cast iron body with bottom outlet, seepage pan and combination membrane flashing clamp, frame, heavy duty heel proof grate and stainless steel sediment bucket.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET	'E' BODY HT. DIM.
3, 4, 6 [75, 100, 150]	___ IC Inside Caulk	3 1/2 [89]
3, 4, 6 [75, 100, 150]	___ IG Inside Caulk w/Sealtrol Gskt.	3 1/2 [89]
3, 4, 6 [75, 100, 150]	___ IP Threaded	3 1/2 [89]
3, 4, 6 [75, 100, 150]	___ NH No-Hub	3 1/2 [89]
3, 4 [75, 100]	___ NL Neo-Loc	2 5/8 [67]

PREFIXES

- ___ Z- D.C.C.I. Body and Grate*
- ___ ZB- D.C.C.I. Body with Polished Bronze Grate (Add 3/16 [5] to 1 3/4 [44] Dim. and 3/8 [1] to 14 [356] Dim.)
- ___ ZN- D.C.C.I. Body with Polished Nickel Bronze Grate (Add 3/16 [5] to 1 3/4 [44] Dim. and 3/8 [1] to 14 [356] Dim.)

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Cast Iron
- ___ -DG Duresist Grate
- ___ -G Galvanized Cast Iron
- ___ -S Secondary Strainer
- ___ -TS Top Secured With Slotted Screws
- ___ -V Backwater Valve (See Z-1099)
- ___ -VP Vandal Proof Secured Top
- ___ -90 90° Threaded Side Outlet Body

REV.	DATE: 06/12/96	C.N. NO. 75191
DWG. NO. P-14346 PRODUCT NO. Z-509-79		

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED