




Z1188-112 LARGE CAPACITY OIL INTERCEPTOR


SPECIFICATION SHEET

TAG _____

Dimensional Data (inches or [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

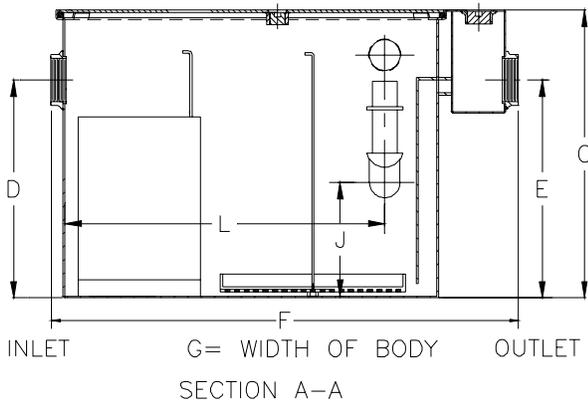

R = DEPTH OF STORAGE TANK
G = WIDTH OF BODY
OIL STORAGE TANK CAPACITY = 500 GAL. [1392]

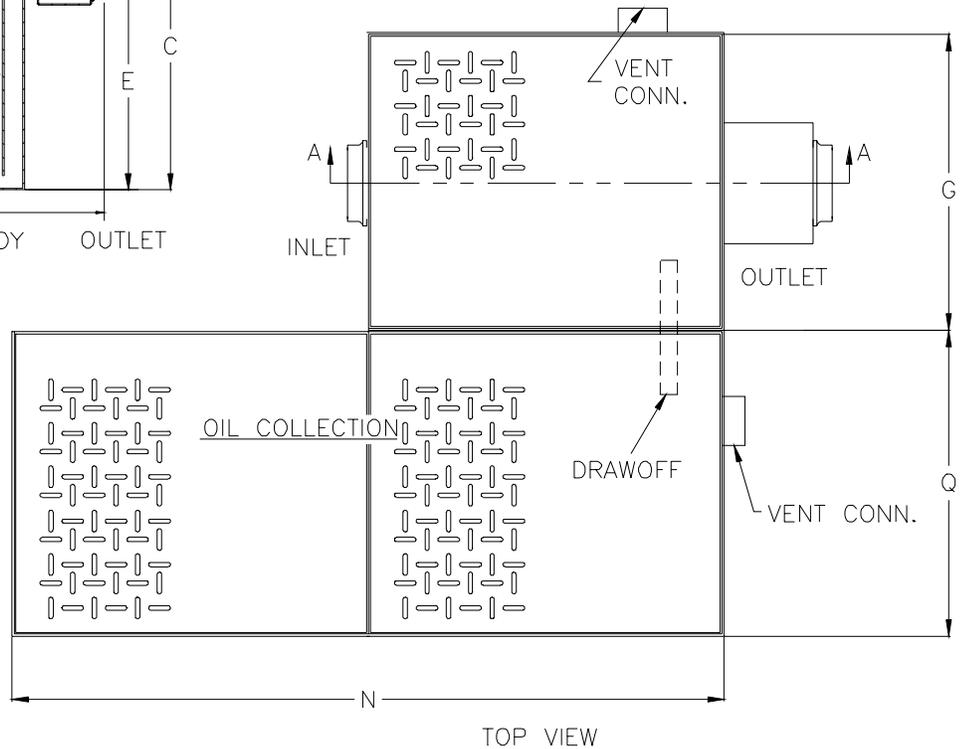

Flow Rate GPM [L] Min	Inlet/Outlet Size**	Water Capacity Gal. [L]	App. Wt. Lbs. [Kg]	No. of Covers				
				Trap 1	Tank 2			
75 [284]	3 [75]	65 [181]	485 [220]	1	2			
Dimensions In Inches								
C	D/E	F	G	J	L	N	Q	R
22 3/4 [578]	18 1/2 [470]	36 [914]	28 5/8 [727]	8 [203]	25 3/4 [654]	67 [1702]	46 [1168]	53 [1346]

ENGINEERING SPECIFICATION: ZURN Z-1188-112 Large capacity Acid Resistant Coated interior and exterior fabricated steel oil interceptor, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections. Secured gasketed non-skid covers complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ **Z** Acid Resistant Coated Fabricated Steel*
- ___ **ZS** All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ **-E** Acid Resistant Coated interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- ___ **-HD** Heavy duty traffic cover rated at 10,000 lbs [4536 kg] maximum safe live load.
- ___ **-K** Anchor flange 1 3/4 [44] down from top and 2 [51] wide. No extension required to accomodate -K.
- ___ **-KC** Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.

REV. A	DATE: 02/16/05	C.N. NO. 92966
DWG. NO. P-14744	PRODUCT NO. Z1188-112	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED