




# Z1183-FC-80

## SOLIDS INTERCEPTOR WITH FLUSH COVER AND 200 [76] G.P.M. FLOW RATE

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

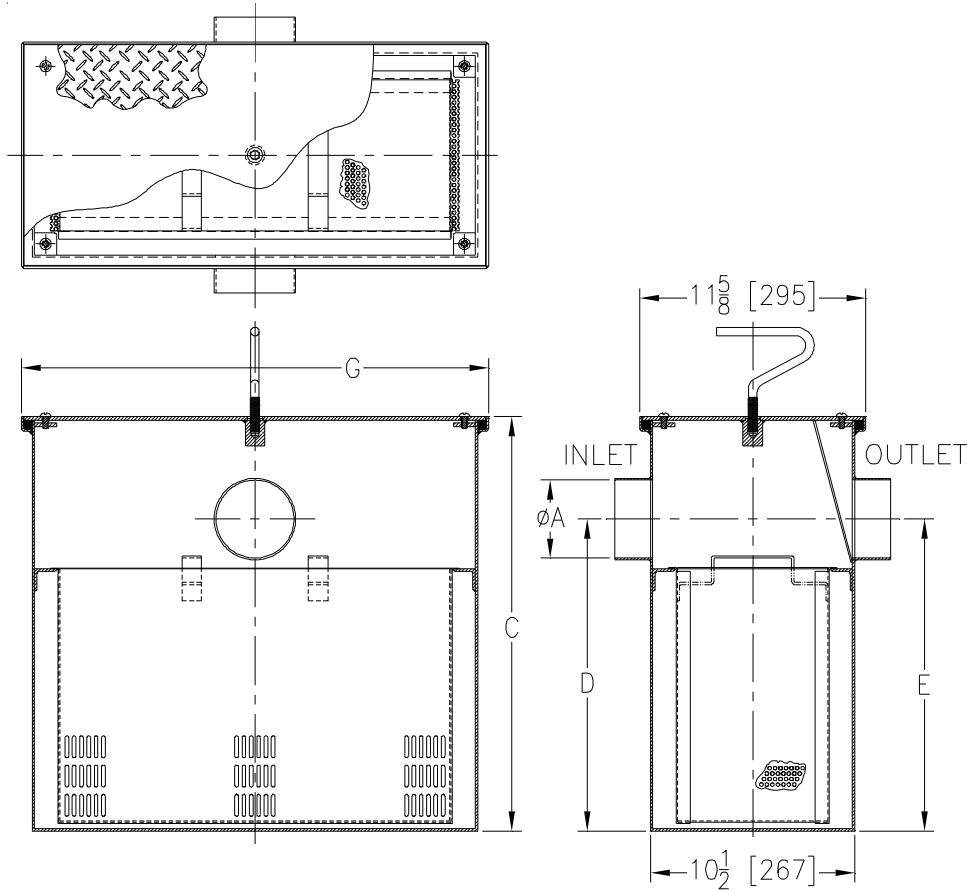

Size	'A' Inlet/Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. Cubic Ft. [m <sup>3</sup> ]	Dimensions In Inches		
				C	G	D/E
1300	4 [102]	200 [76]	2.78 [.079]	35 1/2 [902]	24 3/8 [619]	29 7/8 [759]

**ENGINEERING SPECIFICATION:**  
ZURN Z1183-FC-80

Large capacity acid resistant coated interior and exterior fabricated steel, or stainless steel solids interceptor, for recessed installation with screen attached to gasketed, non-skid secured cover with removable lift handle, and removable sediment basket. Size to be used with corresponding Z1160, Z1170, Z1172 or Z1173 Grease Interceptors.

**OPTIONS** (Check/specify appropriate option)

**PREFIXES**

- \_\_\_ Z Acid Resistant Coated Fabricated Steel\*
- \_\_\_ ZS Type 304 Fabricated Stainless Steel

**SUFFIXES**

- \_\_\_ -CS Custom Screens (Specify material and perforation size required)
- \_\_\_ -E Acid Resistant Coated Interior and Exterior Fabricated Steel Extension Section.
- \_\_\_ -YR Replacement Stainless Steel Bucket Assembly

REV.	DATE: 12/17/09	C.N. NO. 110532
DWG. NO. P-15814	PRODUCT NO. Z1183-FC-80	

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED