




# Z1185-156

## HEAVY-DUTY LINT INTERCEPTOR WITH ANCHOR FLANGE AND CLAMP COLLAR

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

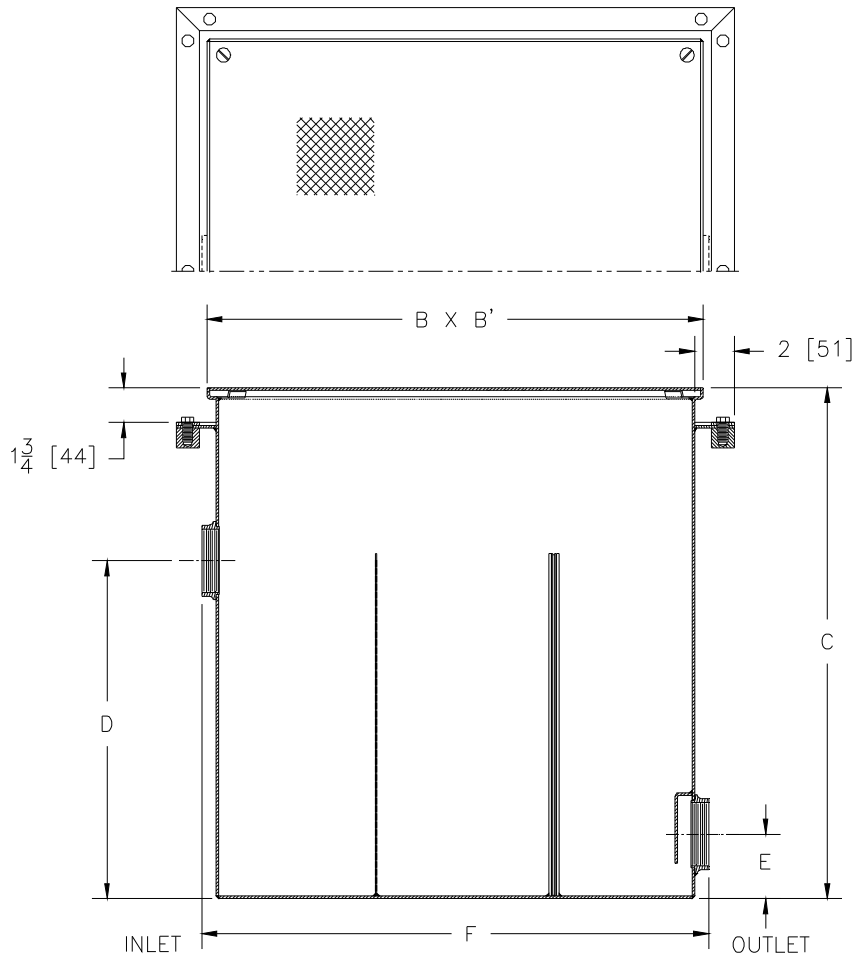

Size - No. of Machines	Inlet/Outlet Size - In [mm]	Flow Rate GPM [LPM]	Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]					
				B	B'	C	D	E	F
30	6 [152]	300 [1136]	730 [331]	45 [1143]	45 [1143]	43 [1092]	36 [914]	5 [127]	46 [1168]

### ENGINEERING SPECIFICATION: ZURN Z1185-156

Acid resistant coated interior and exterior fabricated steel lint interceptor, non-skid heavy-duty secured cover rated at 10,000 lb [4534kg] maximum safe live load with removable lift handle, stainless lint intercepting secondary scree assembly with 3/32" [2mm] square openings and permanent primary straining baffle with 3/8" [10mm] diameter perforated holes. Regularly furnished with high inlet and low outlet.

### OPTIONS (Check/specify appropriate options)

#### PREFIXES

\_\_\_ Z Acid Resistant Coated Fabricated Steel\*

#### SUFFIXES

\_\_\_ -RS Stainless Steel Screen Replacement Assembly

\* Regularly furnished unless otherwise specified.