


SPECIFICATION SHEET

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

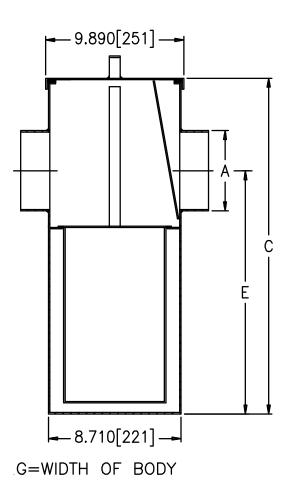

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. Cubic Ft. [m³]	Dimensions In Inches		
				С	G	D/E
800	4 [100]	50 [189]	1.35 [.038]	33-1/2 [851]	24 1/2 [622]	16 [406]

## ENGINEERING SPECIFICATION: ZURN Z-1183-80

Large capacity acid resistant coated fabricated steel, or stainless steel, solids interceptor, for on floor or semi-recessed installation cores with screen attached to gasketed, removable, latched lid, integral 12" [305mm] extension and removable sediment basket. Size to be used with corresponding Z-1170 or Z-1190 Interceptors.

## PREFIXES

- \_\_\_\_ Z-
- Acid Resistant Coated Fabricated Steel\*
- ZS- Stainless Steel

## SUFFIXES

- -SS Custom Stainless Mesh Screen for Bucket. (Specify opening size)
- -YR Replacement Bucket Assembly

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929 In Canada | Zurn Industries Limited 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292 www.zurn.com