



Z883-PVS-OFFSET


3/8 [10] WIDE REVEAL SHALLOW TRENCH DRAIN SYSTEM W/ OFFSET PAVER SLOT GRATE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES

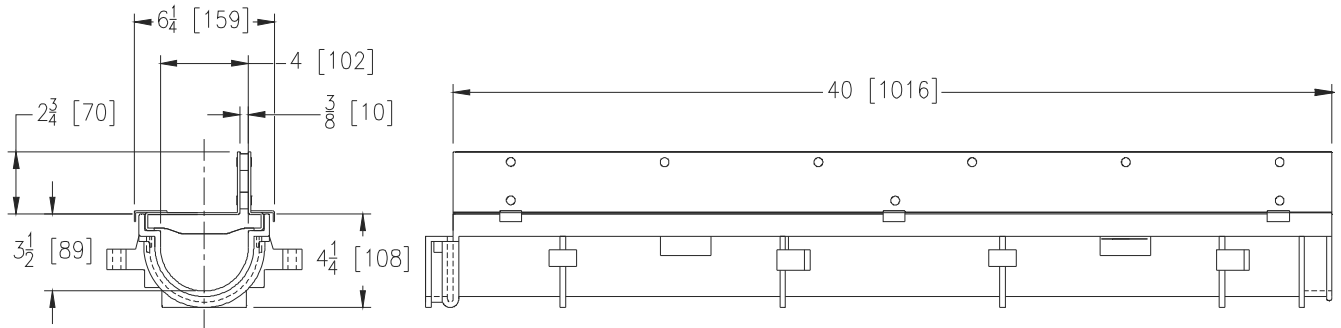

NOTE: + Actual Channel length is 41 1/4 [1048] to allow for overlap.

ENGINEERING SPECIFICATION: Zurn Z883-PVS-OFFSET

40" [1016mm] x 6" [152mm] x 3-1/2" [90mm] Deep (HDPE) High Density Polyethylene Shallow Trench Drain System. Trench comes complete with molded clips for rebar positioning and anchoring. Shall be provided with standard PVS non-removable grate. Zurn .375" [10mm] wide reveal and 2.75" [70mm] tall fabricated steel paver slot grate with ductile iron reinforcing conforming to ASTM specification A536-84, grade 80-55-06 is rated class B per the DIN EN1433 top load classifications. Supplied in 40" [1016mm] nominal lengths with .75" [19mm] bearing depth. Grate has an open area of 4.5 sq. in per ft. [9,525 sq. mm per meter].

PREFIXES

___ Z High Density Polyethylene (HDPE) Modular Drain Channel w/ Steel Paver Slot Grate*

SUFFIXES

- ___ -E1 Closed End Cap
- ___ -E2 2 [51] No-Hub End Outlet
- ___ -PVSG(Offset) Galvanized Offset Paver Slot Grate - Class B
- ___ -PVSS(Offset) Stainless Steel Offset Paver Slot Grate - Class B
- ___ -U2 2 [51] No-Hub End Outlet
- ___ -U3 3 [76] No-Hub End Outlet
- ___ -U4 4 [102] No-Hub End Outlet

* Regularly furnished unless otherwise specified.