




Z415B-84

SPECIFICATION SHEET

BODY ASSEMBLY W/ "TYPE B" STRAINER, ROOF SUMP RECEIVER, UNDERDECK CLAMP & EXTENSIONS

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

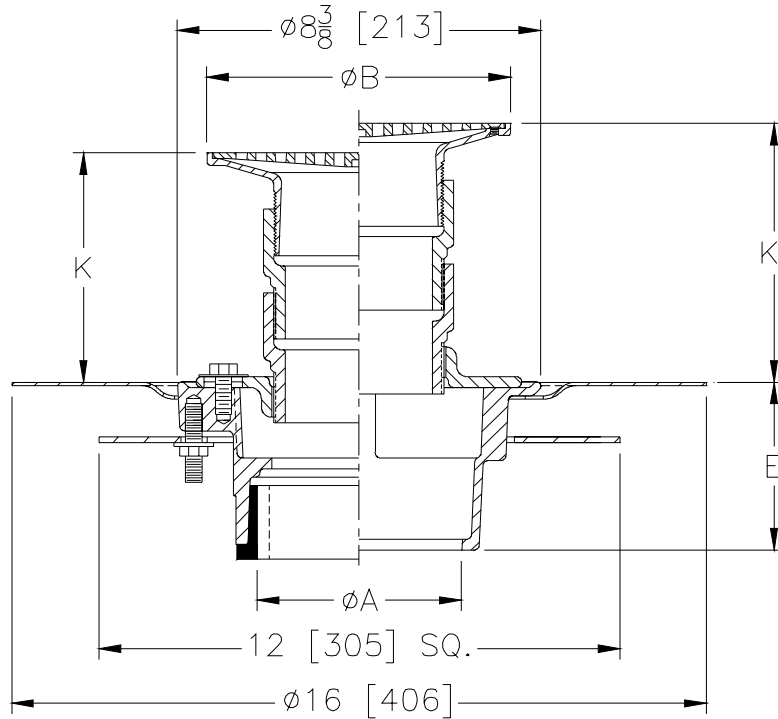

Dimensions In Inches						Approx. Wt. Lbs. [Kg.]	Strainer Open Area Sq. In. [Cm ²]
A Pipe Size [51-76-102]	B Strainer Dia. [152]	K		K'			
		Min. [124]	Max. [191]	Min. [137]	Max. [203]		
2-3-4	6	4 7/8	7 1/2	5 3/8	8	21	9

ENGINEERING SPECIFICATION: ZURN
 ZN415B-84 Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, roof sump receiver, underdeck clamp, U extensions and adjustable collar with "TYPE B" polished nickel bronze strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2 thru 4 [51 thru 102]
- 2 [51]
- 3 [76]
- 4 [102]
- 6 [152]
- 2 thru 4 [51 thru 102]
- 2 thru 4 [51 thru 102]

(Specify type/size) **OUTLET**

- _____ IC Inside Caulk
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ IP Threaded
- _____ NH No-Hub
- _____ NL Neo-Loc

'E' BODY HT. DIMENSION

- 3 7/8 [98]
- 2 3/8 [60]
- 2 5/8 [67]
- 2 7/8 [73]
- 2 3/4 [70]
- 3 7/8 [98]
- 4 5/8 [117]

PREFIXES

- _____ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- _____ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top*
- _____ ZS D.C.C.I. Body Assembly w/ 6 [152] Dia. Stainless Steel Top

SUFFIXES

- _____ -AR Acid Resisting Epoxy Coated Cast Iron
- _____ -G Galvanized Cast Iron
- _____ -P Trap Primer Connection (Specify 1/2 [13] or 3/4 [19])
- _____ -V Backwater Valve
- _____ -90 90° Threaded Side Outlet Body (2 [51], 3 [76] Only)

REV. A	DATE: 02/24/04	C.N. NO. 91964
DWG. NO. P-14296	PRODUCT NO. Z415B-84	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED