




Z1170-157

SIZE 300 GREASE INTERCEPTOR W/ INTEGRAL EXTENSION & CUSTOM INLET/OUTLET LOCATION

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

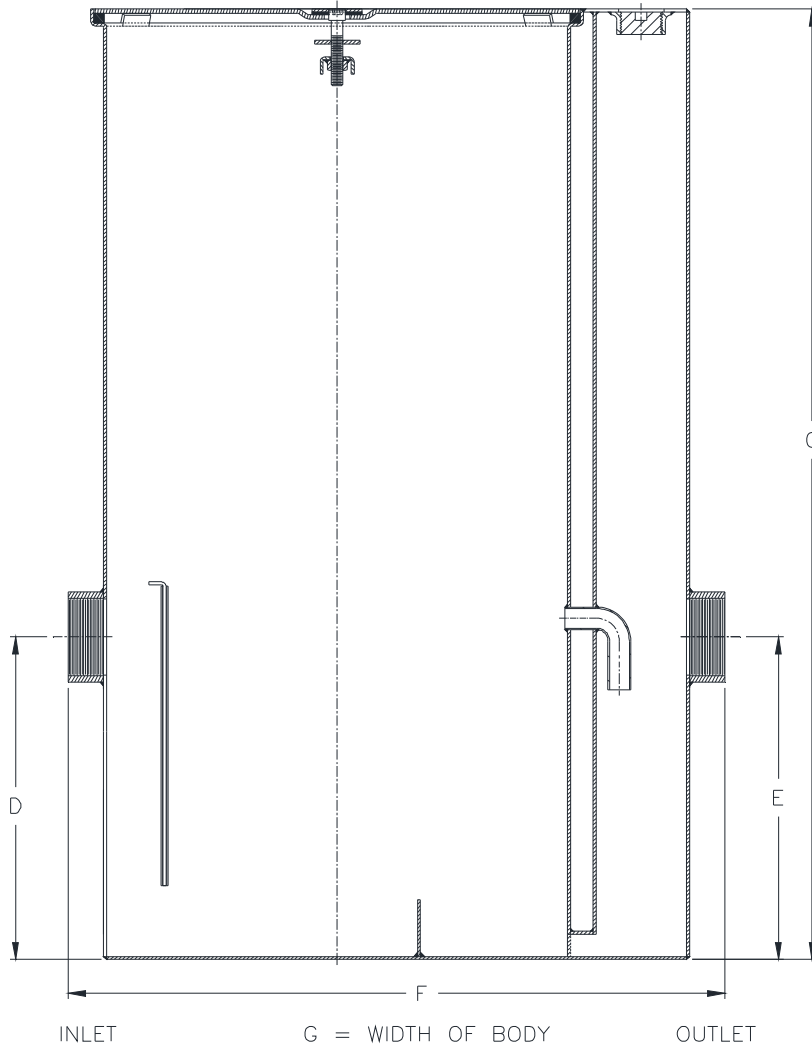

NOTE: Interceptor is built to customer specifications and has not been tested to verify the products performance & efficiency. The customer will accept all liability for the performance of this product.

Size	Inlet/Outlet Size*	Flow Rate G.P.M. [L.P.M.]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches [mm]			
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G
300	4 [76]	10 [38]	10 [38]	20 [9]	112 [51]	42 [1067]	14-1/4 [362]	25 1/8 [638]	14[356]

ENGINEERING SPECIFICATION: ZURN Z1170-157

Acid Resistant Coated interior and exterior fabricated steel grease interceptor, Size 300, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection.

PREFIXES

- ___ Z Acid Resistant Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel

SUFFIXES

- ___ -AL Aluminum Cover
- ___ -HD Heavy Duty Cover rated at 10,000 lbs. maximum safe live load.
- ___ -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide.
- ___ -KC Anchor flange 1 3/4 [44] down from top and 2 [51] wide with clamp collar.
- ___ -L Angle type (Z1108-L) flow control device with plunger.

* Regularly furnished unless otherwise specified.