




Z1171-TD-75

LOW PROFILE GREASE INTERCEPTOR W/ ACCUMULATING CONE, FLOW CONTROL TEE & NOTIFICATION SYSTEM

SPECIFICATION SHEET
TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

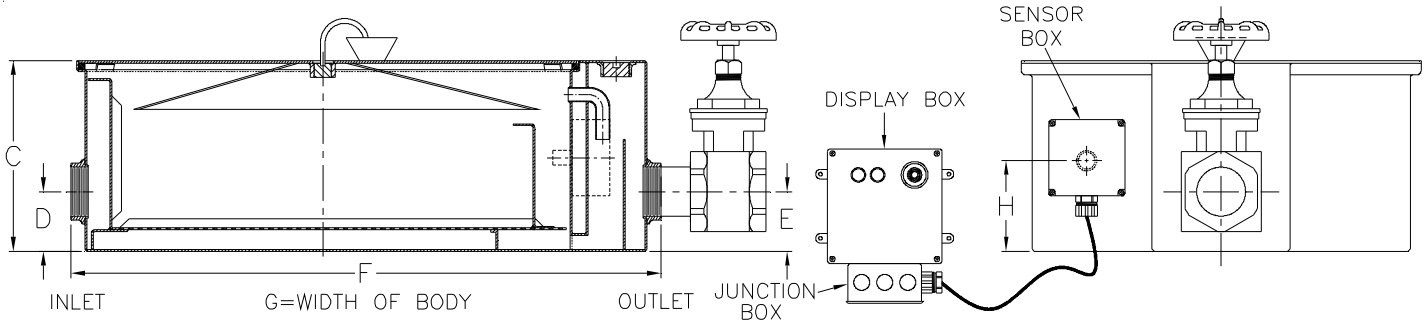

Size	Inlet/ Outlet Size**	Flow Rate G.P.M. [L]	Capacity		Approx. Wt. Lbs. [kg]	Dimensions in Inches				
			Water Gal. [L]	Grease Lbs. [kg]		C	D/E	F	G	H
500	3 [76]	20 [75]	15 [57]	40 [18]	102 [46]	10 [254]	3 1/8 [79]	31 [787]	21 1/8 [537]	4 7/8 [124]
700		35 [132]	30 [114]	70 [32]	172 [78]	10 3/4 [273]	3 1/8 [79]	42 1/8 [1070]	29 3/8 [746]	5 1/2 [140]
800		50 [189]	45 [170]	100 [45]	210 [95]	16 [406]	10 [254]	49 1/2 [1257]	29 3/8 [746]	8 1/8 [206]

ENGINEERING SPECIFICATION: ZURN Z1171-TD-75

Acid Resistant Coated interior and exterior fabricated steel low type grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug and visible double wall trap seal with removable combination pressure equalizing/flow diffusing baffle and sediment tray. Includes gasketed non-skid secured cover with draw off port having bronze plug, grease accumulating cone, NPT to hose adapter, 24 [610] flexible hose, hose clamp, and in line closure valve. Complete with encased fiberglass sensor box containing an electric grease level sensor, fiberglass display box with audio and visual alarm and junction box. Regularly furnished with 3 [76] low inlet and outlet with Z1108 flow control fitting.**

OPTIONS (Check/specify appropriate options)

PREFIXES

____ **Z** Acid Resistant Coated Fabricated Steel*

SUFFIXES

____ **-L** Angle type (Z1108-L) flow control device with plunger.

____ **-PW** Plug wrench

** Inlet and outlet sizes shown indicate standard operating sizes and flow control settings. All sizes will have 4 [102] connections reduced to 3 [76] as standard. If changed, flow control must be adjusted accordingly.

REV.	DATE: 08/03/07	C.N. NO. 97074
DWG. NO. P-15456	PRODUCT NO. Z1171-TD-75	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED