


## Z1170-125 GREASE INTERCEPTOR W/ CUSTOM DIMENSIONS

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

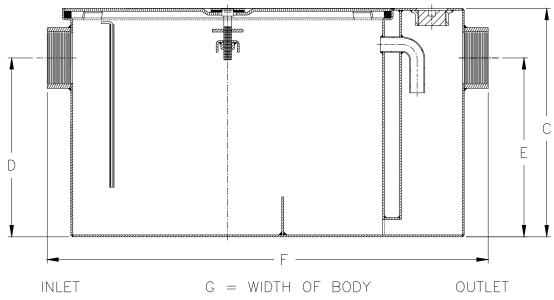

Note: This interceptor is not PDI approved due to custom dimensions.

Γ	Size	Inlet/ Outlet Size**	Flow Rate	Capacity		Approx.		Dimensions in Inches			
			G.P.M.	Water	Grease	Wt. Lbs.					
			[L]	Gal. [L]	Lbs. [kg]	[kg]	С	D/E	F	G	
	600	3 [76]	25 [94]	21 [79]	50 [23]	124 [56]	19 3/4 [502]	15 1/4 [387]	30 [762]	16 3/4 [425]	
	800	3 [70]	50 [189]	40 [151]	100 [45]	180 [82]	24 1/4 [616]	17 1/2 [445]	35 1/2 [902]	20 3/4 [527]	

**ENGINEERING SPECIFICATION**: ZURN Z1170-125 Acid Resistant Coated interior and exterior fabricated steel grease interceptor, rated at \_\_\_\_\_ GPM and \_\_\_\_\_ Lbs. grease capacity, with internal air relief by-pass, bronze cleanout plug, removable pressure equalizing/flow diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed non-skid secured cover complete with center tie down assembly, with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection. Note: Location of outlet from bottom of interceptor cannot be changed.

## PREFIXES

Z Acid Resistant Coated Fabricated Steel\*

ZS All Type 304 Fabricated Stainless Steel

## SUFFIXES

- \_\_\_\_\_ -AL Aluminum Cover
- \_\_\_\_\_ -DI Dual High/Low Inlet.
- -E Acid Resistant Coated Interior and exterior fabricated steel extension section. (Specify 'C' Dim. required) for recessed installation.
- -HD Heavy Duty Cover rated at 10,000 lbs. maximum safe live load. A 3 [76] minimum extension height is required when Heavy Duty Cover (-HD) option is specified.
- -K Anchor flange 1 3/4 [44] down from top and 2 [51] wide. A 3 [76] minimum extension height is required when anchor flange (-K)option is specified. (Specify 'C' Dim. height required.)
- \_\_\_\_\_ -L Angle type (Z1108-L) flow control device with plunger.
- -R Acid resistant coated interior and exterior fabricated steel recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- -RE Acid resistant coated interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed non-skid cover with covered recessed lift handle.
- -T Cover recessed for tile/terrazzo. A 3 [76] minimum extension height is required. (Specify 'C' Dim. and required recess depth 1/8 [3], 3/4 [19], or 1 1/4 [32]).
  - \*\* Inlet and outlet sizes shown indicate standard operating sizes and flow control setting. Size #300 will have 3 [76] connections reduced to 2 [51] and sizes #600 thru #800 will have 4 [102] connections reduced to 3 [76] as standard. If changed, flow control must be adjusted accordingly.

	REV.	DATE: 2/5/08	3 C.N. NO. 98072					
*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED	DWG. NO.	P-15515 PRC	DUCT NO. Z1170-125					
ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514 Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com								