




Z1020-81

ELECTRONIC TRAP PRIMER W/ STAINLESS STEEL MOUNT BOX AND 3/4 COPPER INLET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

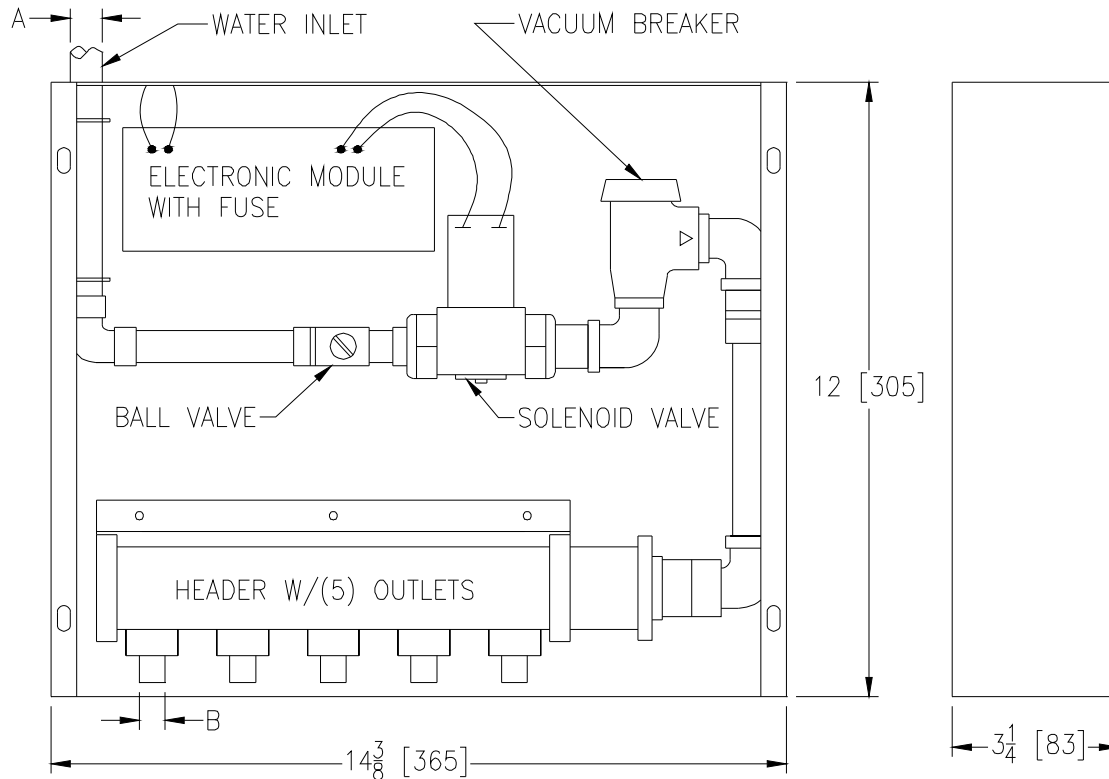

Dimensions in Inches		Approx. Wt. Lbs. [kg]
A	B	
3/4 [19]	1/2 [13]	12 [5]

ENGINEERING SPECIFICATION: ZURN Z1020-81

Electronic trap primer programmed as standard to provide a six second water injection to traps every twenty-four hours*, complete with stainless steel combination surface or recessed mount box and cover, 3/4 [19] solder copper inlet connection, brass ball type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120 - 24 VAC transformer, brass atmospheric vacuum breaker that is ASSE listed 1001, PEX waterway, and anti-scaling multi-port manifold with five 1/2 [13] Male PEX outlet connections. (For copper connection outlets -CW option must be specified.)

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -CW Copper Waterway (with 1/2 [13] Female I.P.S. Connection)
- ___ -DU4 Additional Distribution Units with Copper Waterway (Specify Quantity)
(Contact Zurn for Sizing Specifications)
- ___ -10 Ten Outlets

REV.	DATE: 9/14/2011	C.N. NO. 122101
DWG. NO. 300111		PRODUCT NO. Z1020-81

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED